
Novelties
2024





Nowodvorski
LIGHTING

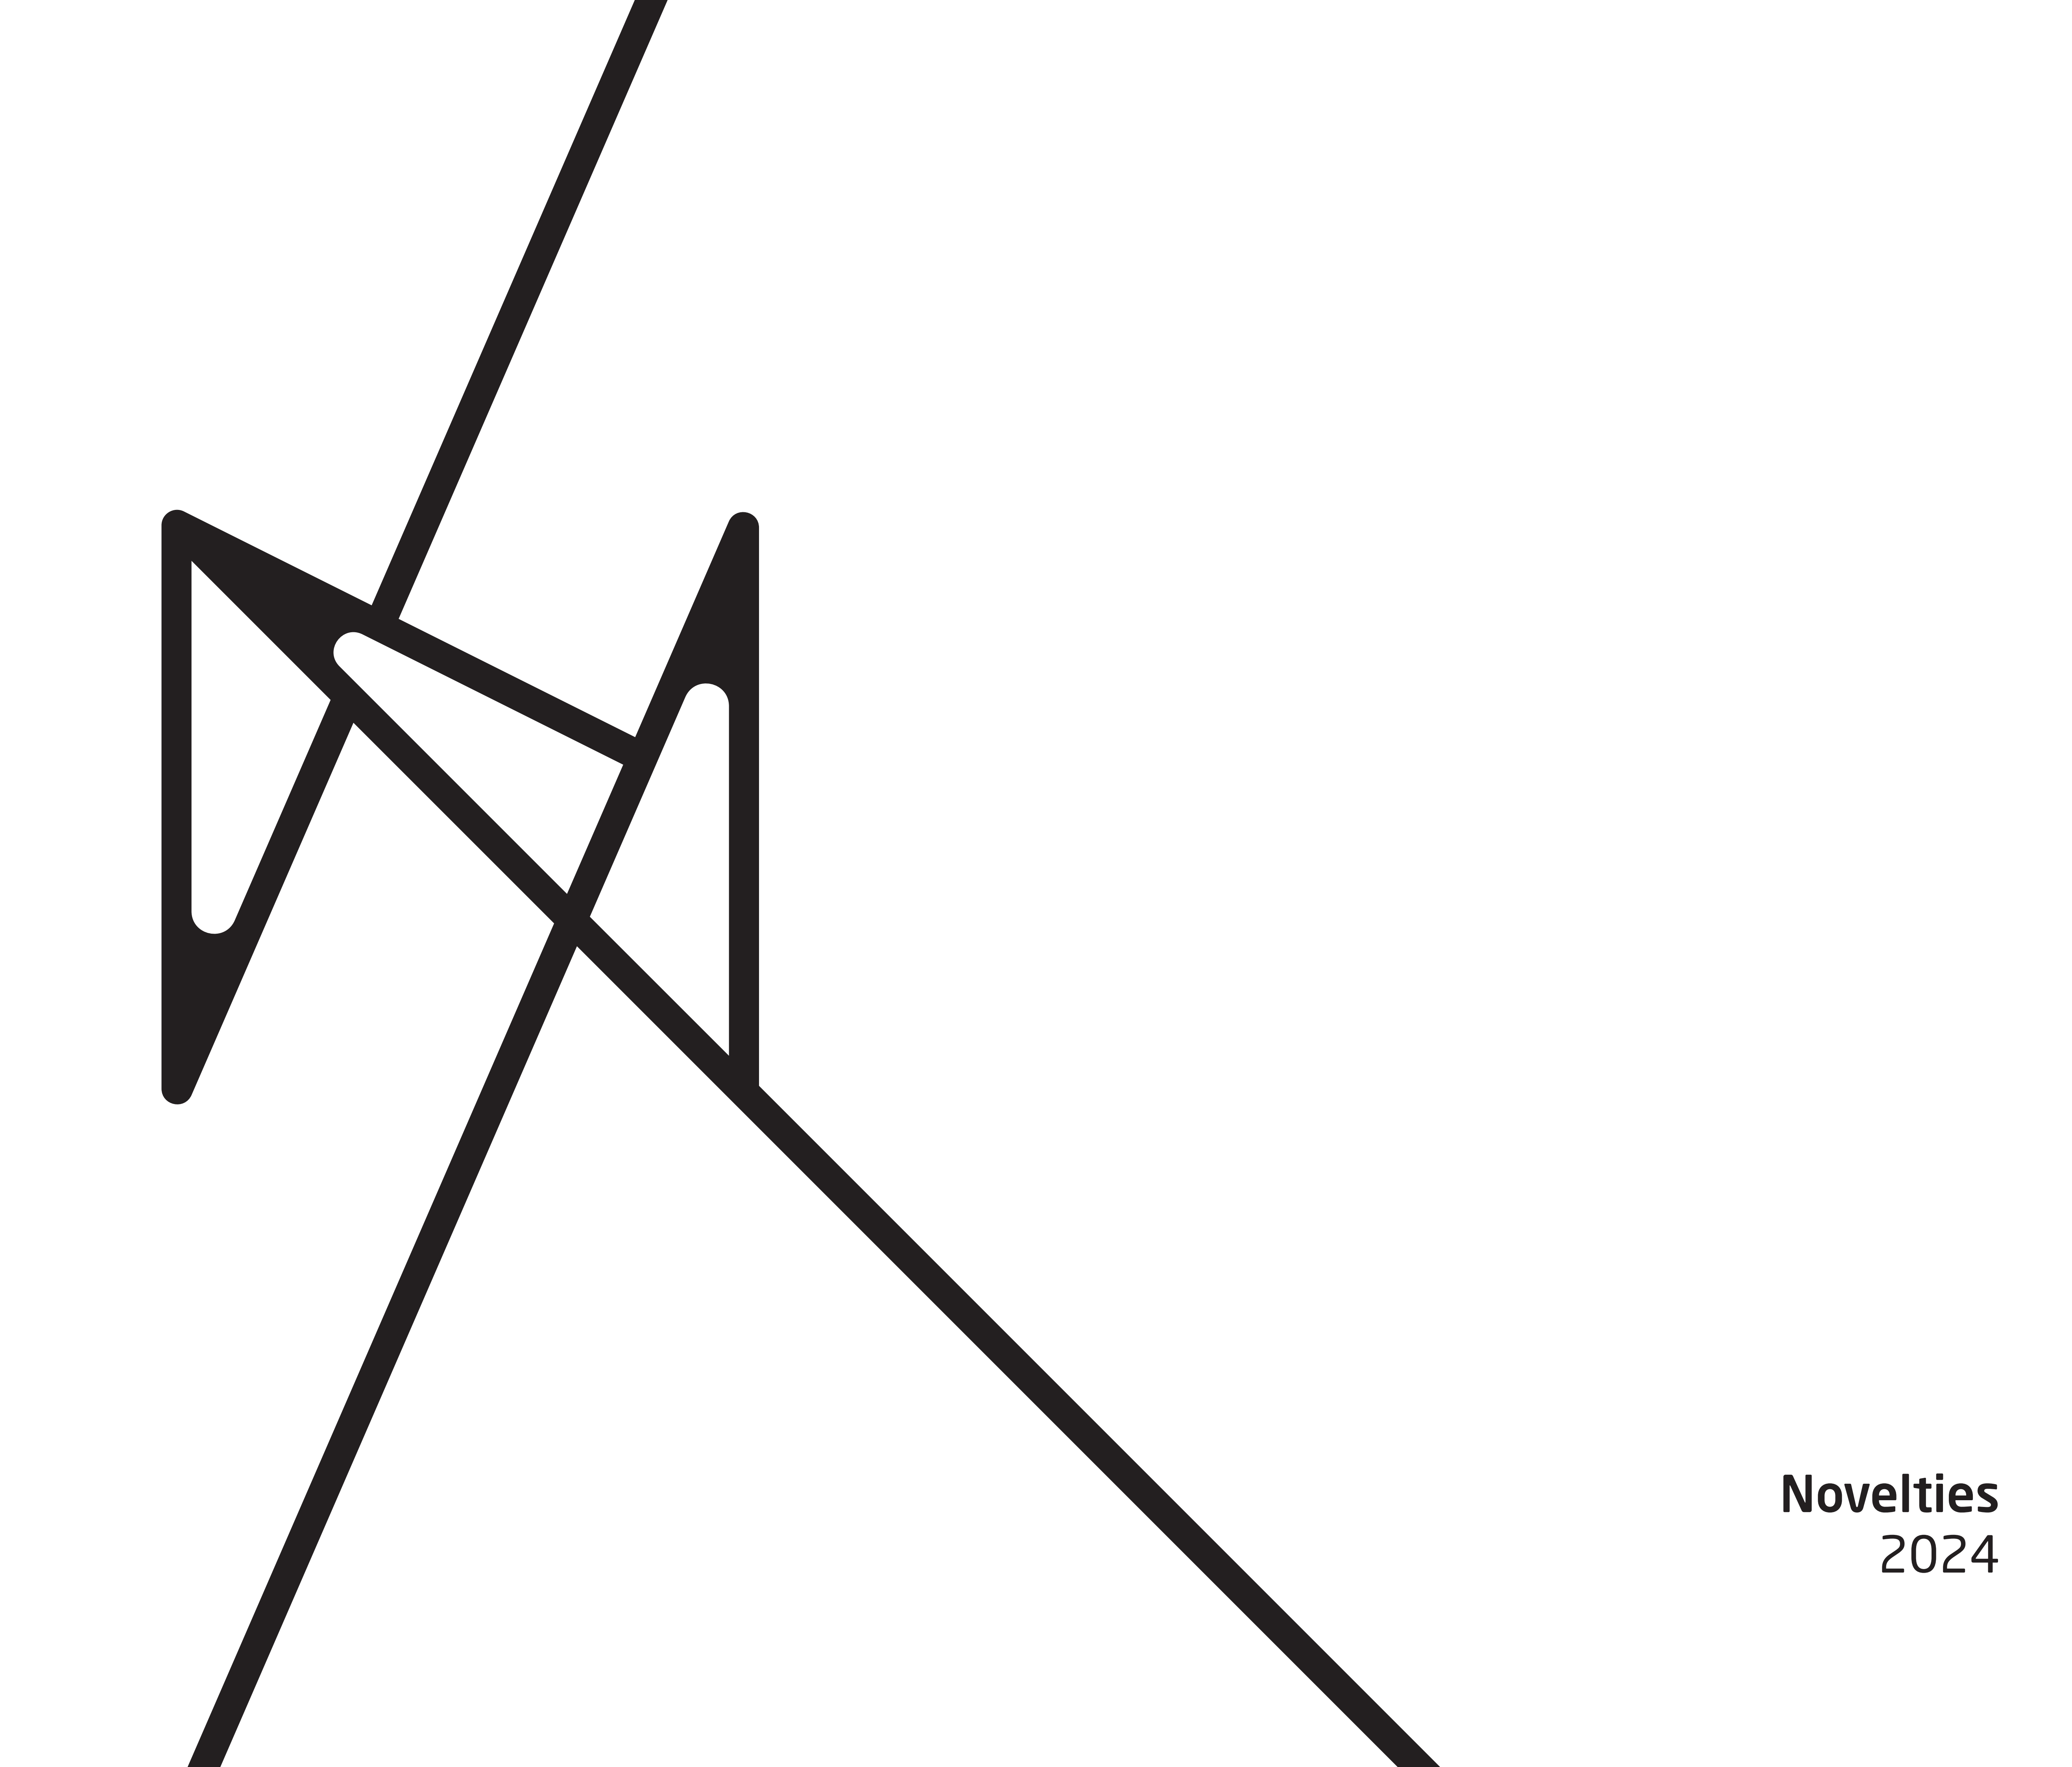

Novelties
2024


DROPS WOOD C
11175
DROPS WOOD D
11176

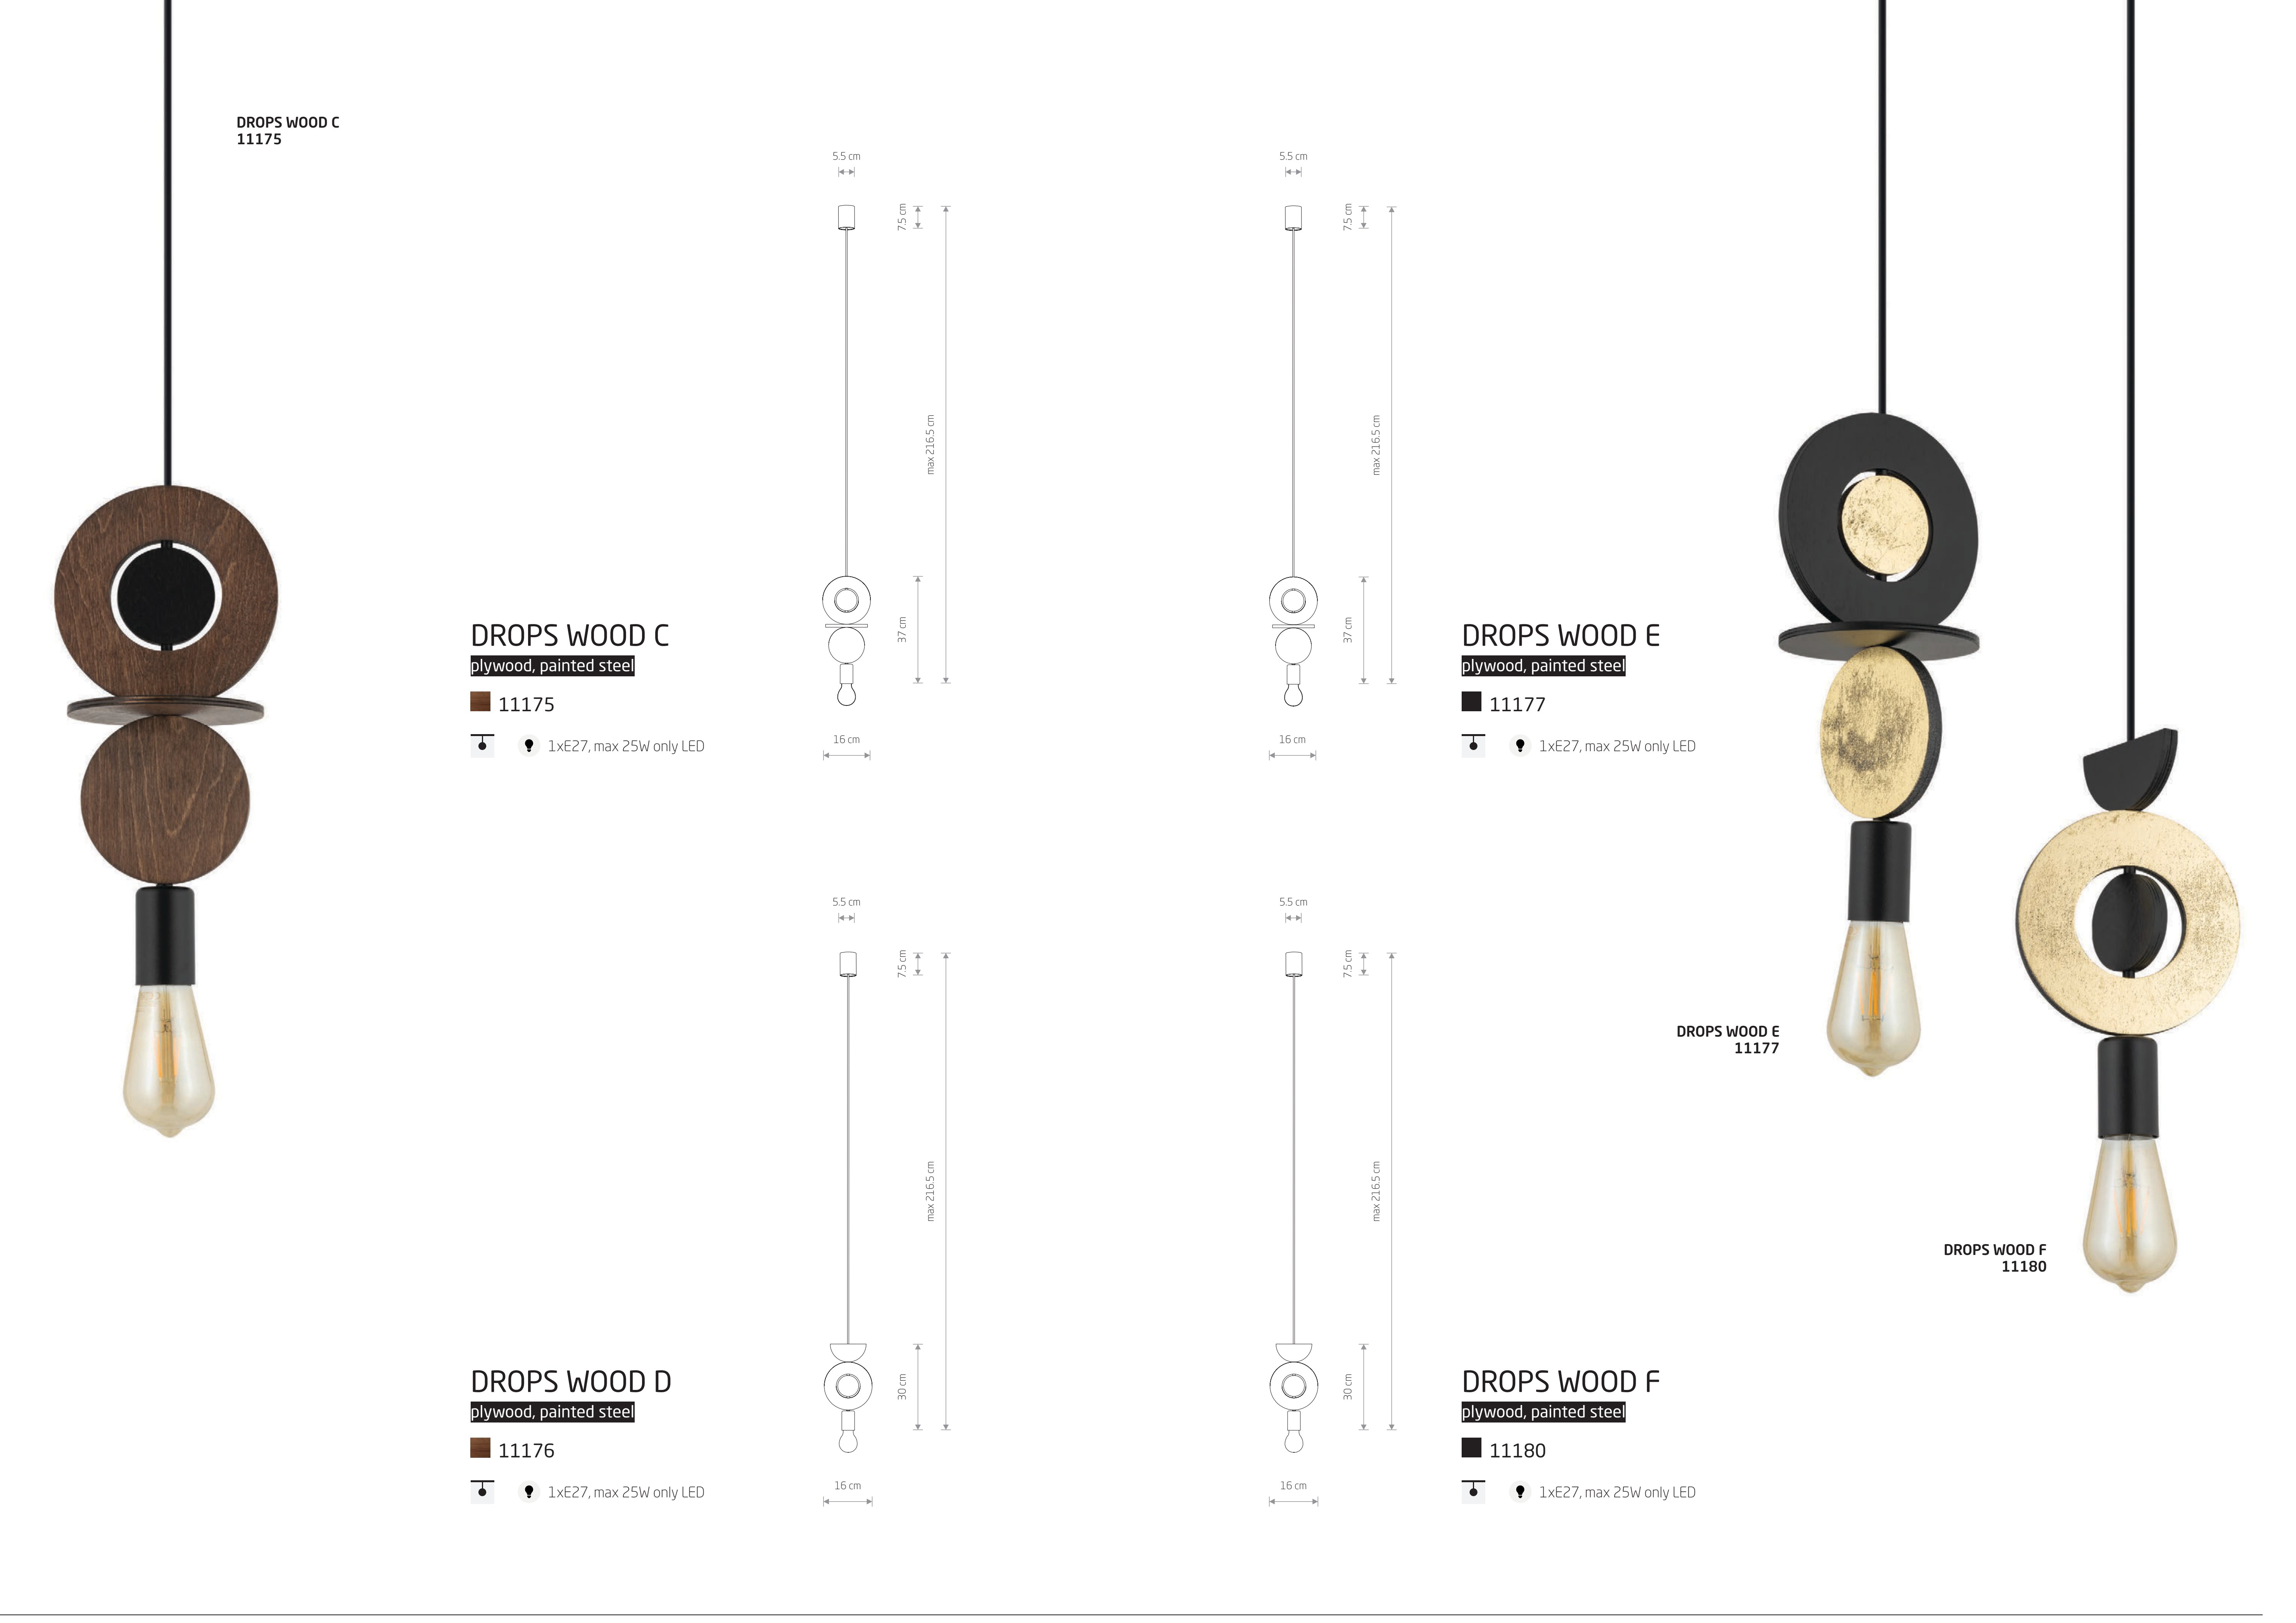

DROPS WOOD C
plywood, painted steel

11175

1xE27, max 25W only LED

DROPS WOOD E
plywood, painted steel

11177

1xE27, max 25W only LED

DROPS WOOD D
plywood, painted steel

11176

1xE27, max 25W only LED

DROPS WOOD F
plywood, painted steel

11180

1xE27, max 25W only LED

DARK WOOD BLACK P013 RAL 9005

BLACK P013 RAL 9005 GOLD

DROPS WOOD A
11173

DROPS WOOD B
11174

5.5 cm
7.5 cm
max 216.5 cm
43 cm
12 cm
16 cm

DROPS WOOD A

plywood, glass, painted steel

11173

1xG9, max 12W only LED

BULB LED G9, 4W

7503 3000K 7504 4000K

5.5 cm
7.5 cm
max 216.5 cm
35 cm
12 cm
16 cm

DROPS WOOD B

plywood, glass, painted steel

11174

1xG9, max 12W only LED

BULB LED G9, 4W


7503 3000K 7504 4000K

DROPS WOOD A
11173

WHITE NATURAL WOOD BLACK P013 RAL 9005




RING TIMBER LED M
11290



RING TIMBER LED S

plywood, painted steel

11288





RING TIMBER LED M

plywood, painted steel

11290


4 cm

75 cm

RING TIMBER LED XXL

plywood, painted aluminum, painted steel

11178

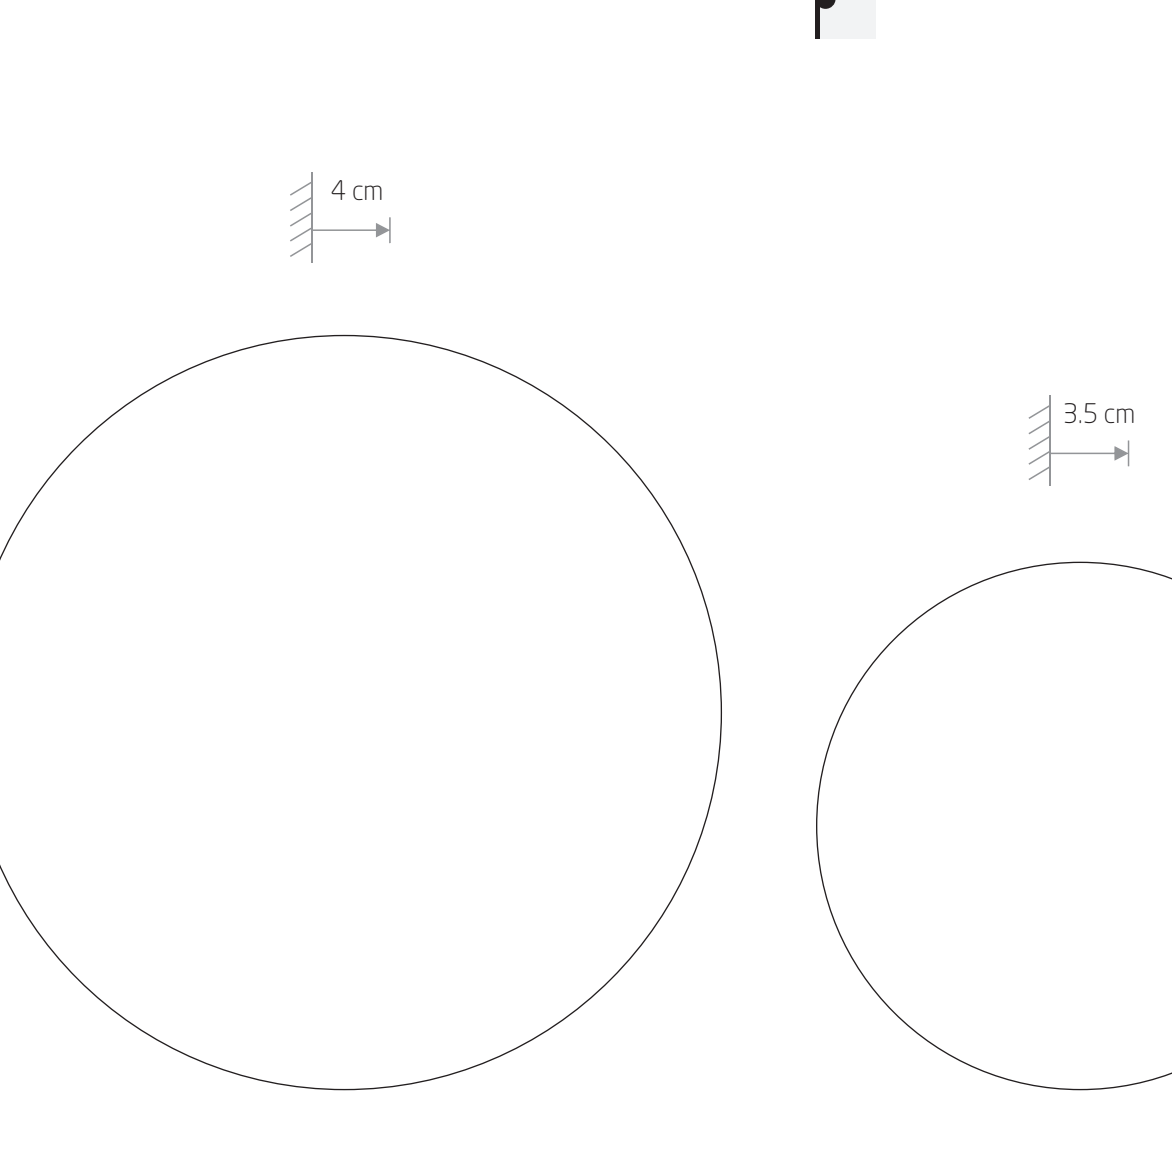

RING TIMBER LED XL

plywood, painted steel

11292

3.5 cm


35 cm

RING TIMBER LED L

plywood, painted steel

11291

RING TIMBER LED XXL
11178

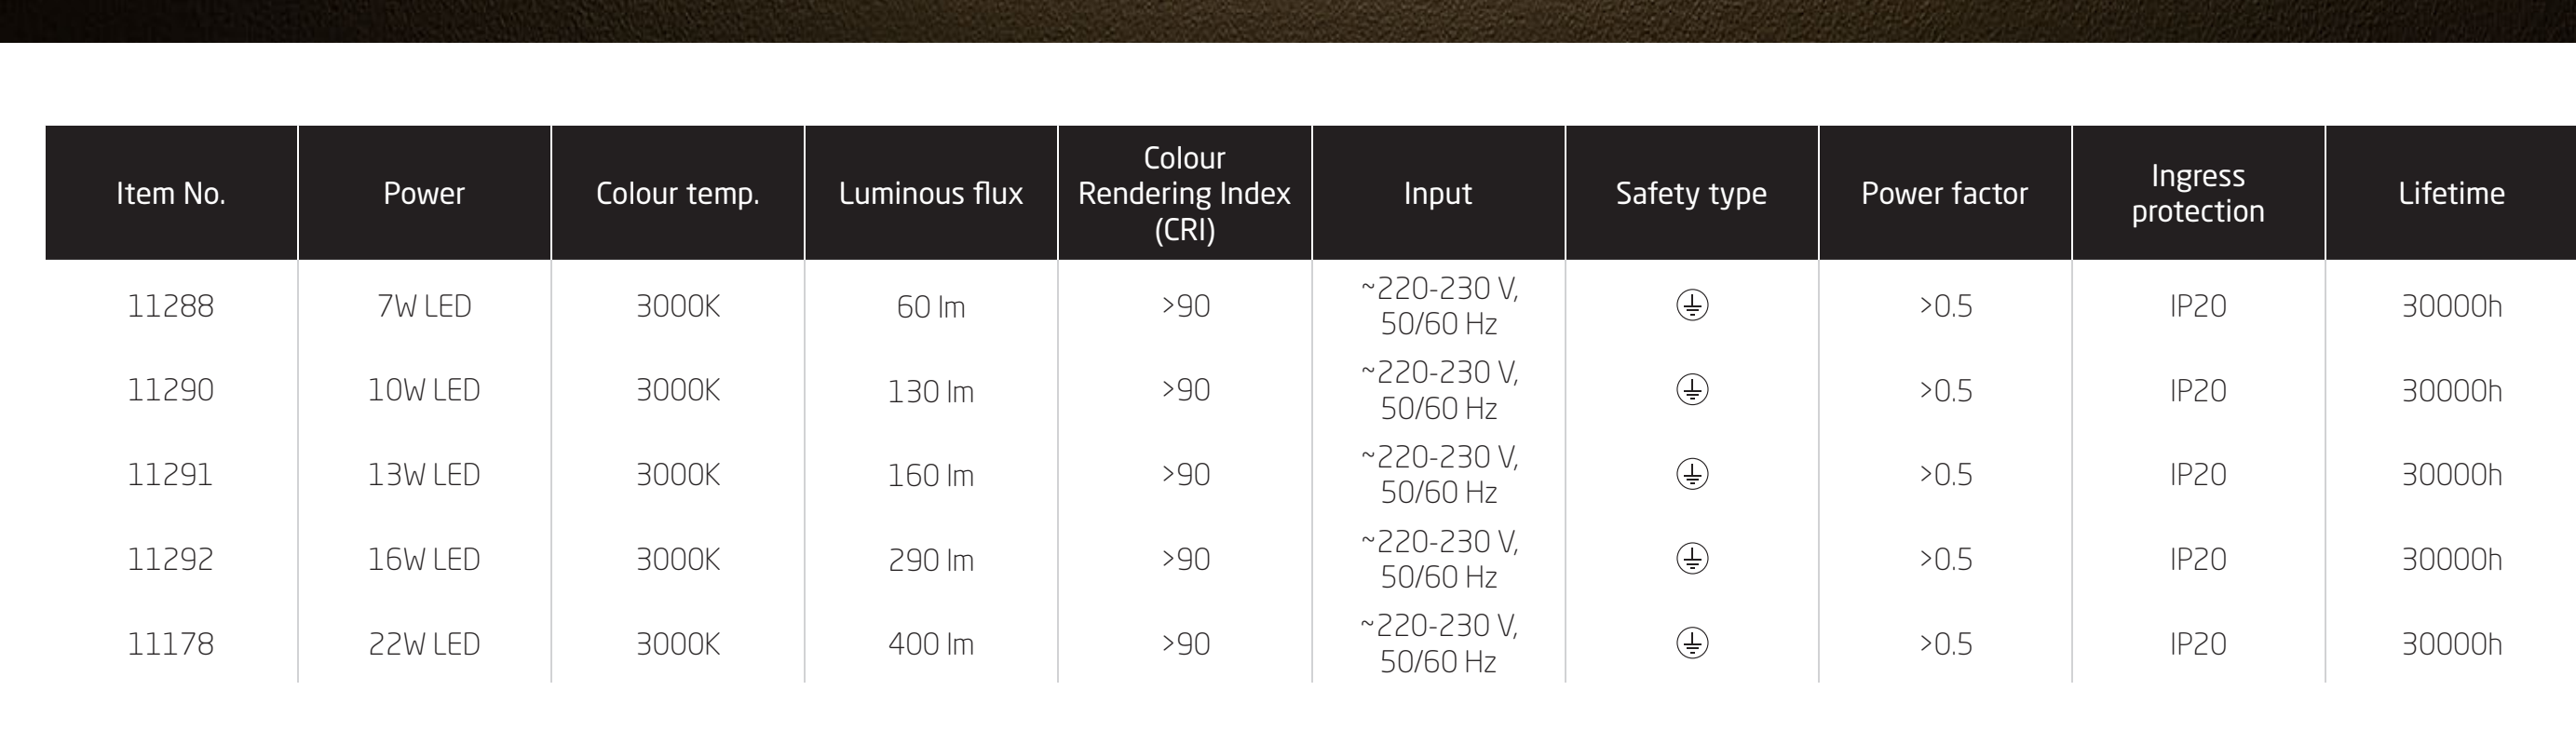

Item No.	Power	Colour temp.	Luminous flux	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11288	7W LED	3000K	60 lm	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
11290	10W LED	3000K	130 lm	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
11291	13W LED	3000K	160 lm	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
11292	16W LED	3000K	290 lm	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
11178	22W LED	3000K	400 lm	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h



DARK WOOD



RATTAN L
11155
RATTAN M
11154



RATTAN L
11155
RATTAN S
1113
RATTAN M
11154
PUKET L
11162
PUKET M
11161
PUKET S
11160
5.5 cm
7.5 cm
max 160 cm
45 cm
79 cm
RATTAN L
rattan, painted steel
11155
1xE27, max 25W only LED
5.5 cm
7.5 cm
max 160 cm
33 cm
60 cm
RATTAN M
rattan, painted steel
11154
1xE27, max 25W only LED
5.5 cm
7.5 cm
max 160 cm
23 cm
40 cm
RATTAN S
rattan, painted steel
11153
1xE27, max 25W only LED
5.5 cm
7.5 cm
max 160 cm
55 cm
30 cm
PUKET L
bamboo, painted steel
11162
1xE27, max 25W only LED
5.5 cm
7.5 cm
max 160 cm
42 cm
26 cm
PUKET M
bamboo, painted steel
11161
1xE27, max 25W only LED
5.5 cm
7.5 cm
max 160 cm
35 cm
21 cm
PUKET S
bamboo, painted steel
11160
1xE27, max 25W only LED
NATURAL WOOD
WHITE P004 RAL 9003
NATURAL WOOD
WHITE P004 RAL 9003
Nowodvorski LIGHTING





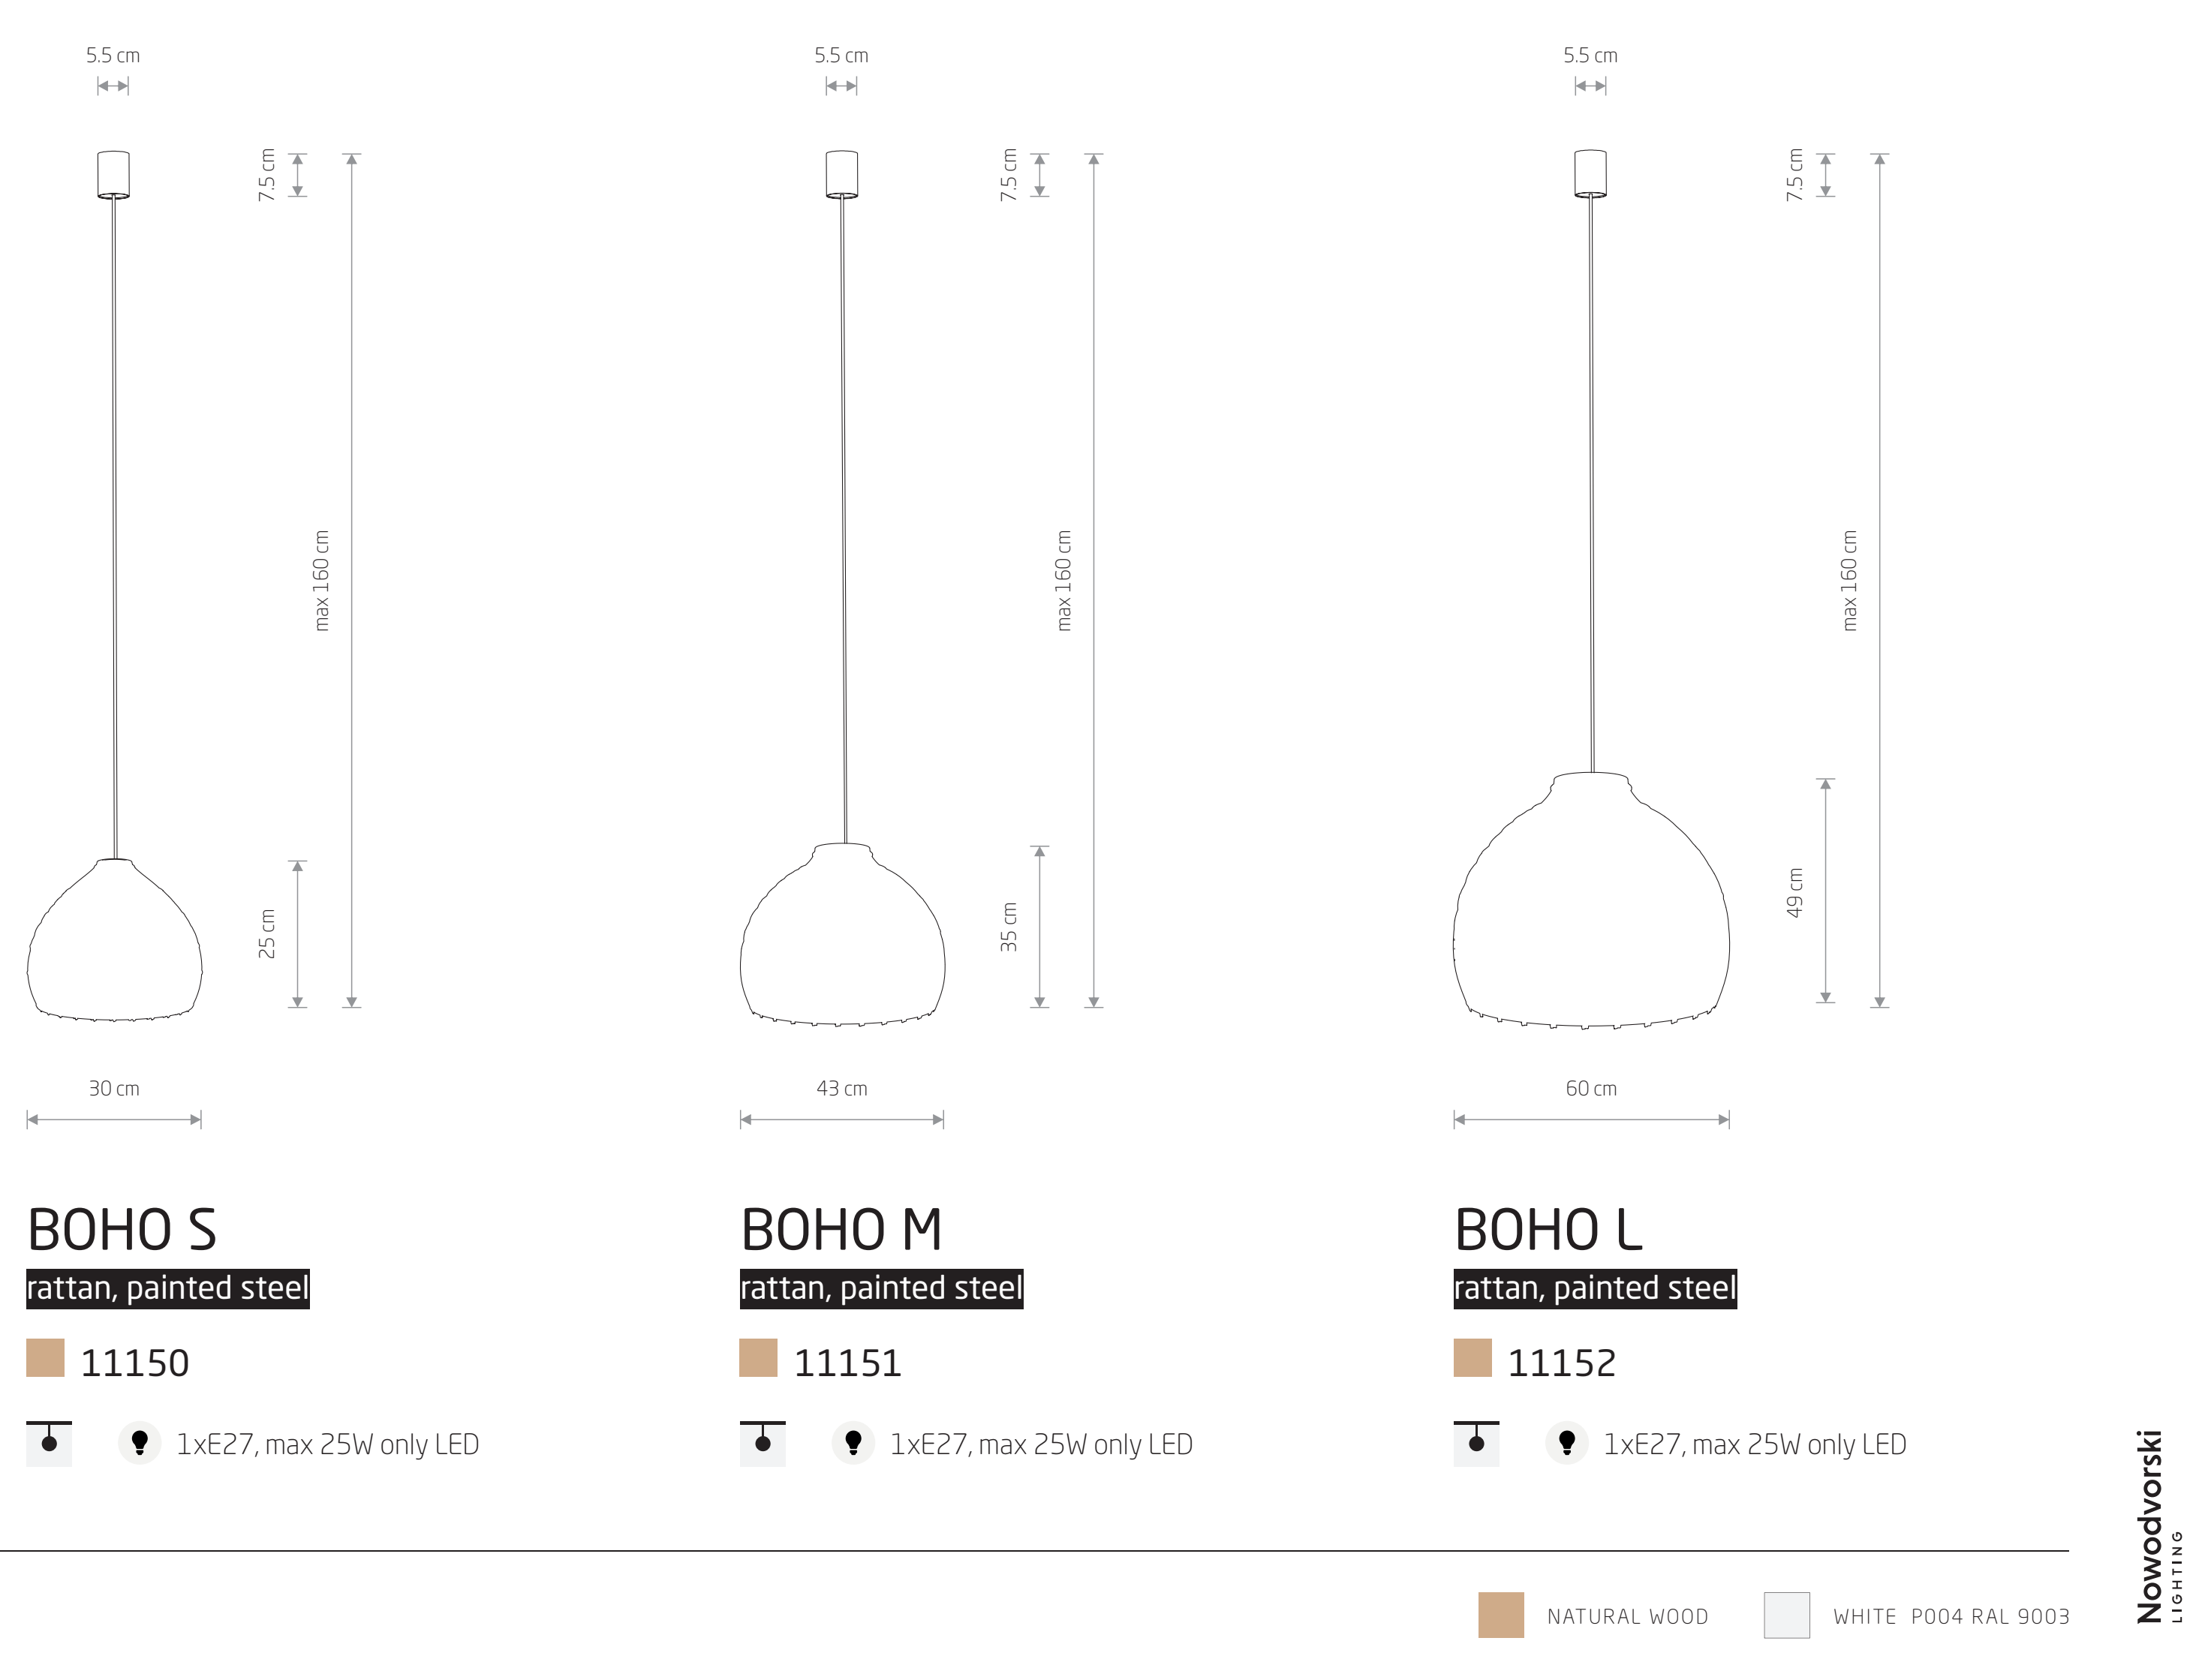

BOHO S

rattan, painted steel

11150

1xE27, max 25W only LED

BOHO M

rattan, painted steel

11151

1xE27, max 25W only LED

BOHO L

rattan, painted steel

11152

1xE27, max 25W only LED

NATURAL WOOD   WHITE P004 RAL 9003




HAITI M
11164
HAITI M
11164

HAITI L
11168

HAITI S
11166

5.5 cm | 7.5 cm | max 160 cm | 42 cm | 43 cm

5.5 cm | 7.5 cm | max 160 cm | 48 cm | 50 cm

5.5 cm | 7.5 cm | max 160 cm | 67 cm | 53.5 cm

HAITI S

bamboo, painted steel

11163 11166

1xE27, max 25W only LED

HAITI M

bamboo, painted steel

11164 11167

1xE27, max 25W only LED

HAITI L

bamboo, painted steel

11165 11168

1xE27, max 25W only LED

NATURAL WOOD WHITE P004 RAL 9003 BLACK P013 RAL 9005

HAITI S
11166

HAVANA S
11170

HAVANA M
11396

12 cm
4 cm
39 cm
50 cm

HAVANA S
bamboo, painted steel, plastic ABS

11170

1xE27, max 25W only LED

12 cm
4 cm
44 cm
60 cm

HAVANA M
bamboo, painted steel, plastic ABS

11171

1xE27, max 25W only LED

12 cm
4 cm
59 cm
80 cm

HAVANA L
bamboo, painted steel, plastic ABS

11172

1xE27, max 25W only LED

5.5 cm
7.5 cm
max 160 cm
35 cm
50 cm

HAVANA S
bamboo, painted steel

11395

1xE27, max 25W only LED

5.5 cm
7.5 cm
max 160 cm
40 cm
60 cm

HAVANA M
bamboo, painted steel

11396

1xE27, max 25W only LED

5.5 cm
7.5 cm
max 160 cm
55 cm
80 cm

HAVANA L
bamboo, painted steel

11397

1xE27, max 25W only LED

NATURAL WOOD WHITE P003 RAL 9003

NATURAL WOOD WHITE P003 RAL 9003





JAPANDI S

paper rope, painted steel

11156

1xE27, max 25W only LED

JAPANDI M

paper rope, painted steel

11157

1xE27, max 25W only LED

JAPANDI M
11157

NATURAL WOOD   WHITE P004 RAL 9003

KRABI
11158

KRABI
11158

5.5 cm

7.5 cm

max 160 cm

25 cm

40 cm

KRABI

bamboo, painted steel

11158

1xE27, max 25W only LED

NATURAL WOOD


WHITE P004 RAL 9003






PUMPKIN M
11245
PUMPKIN S
11243





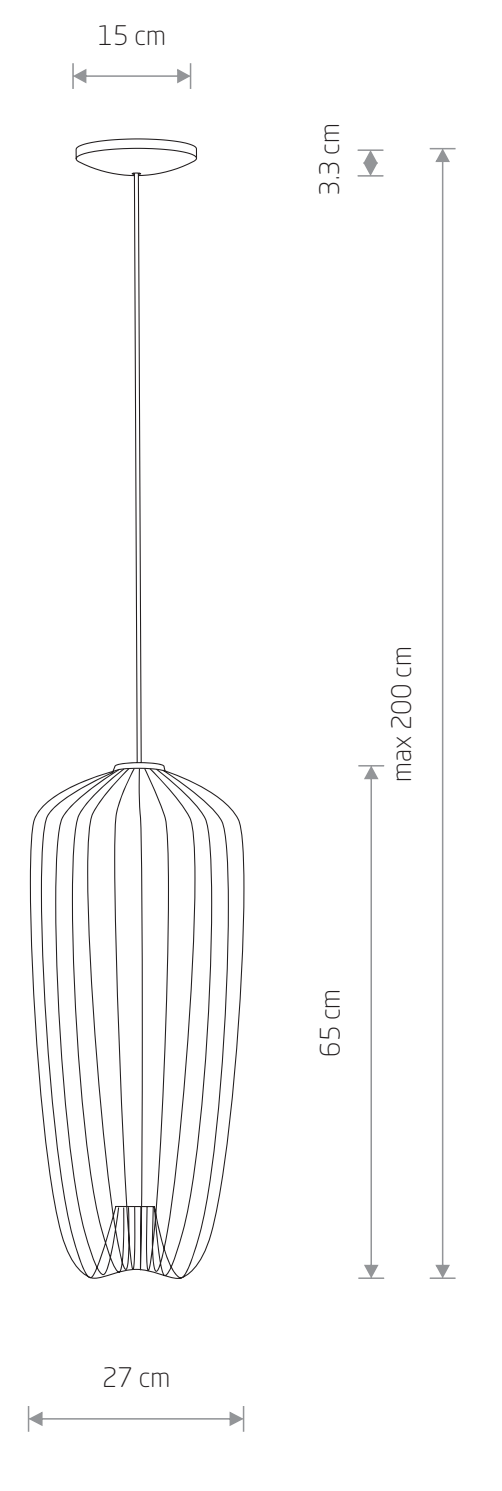

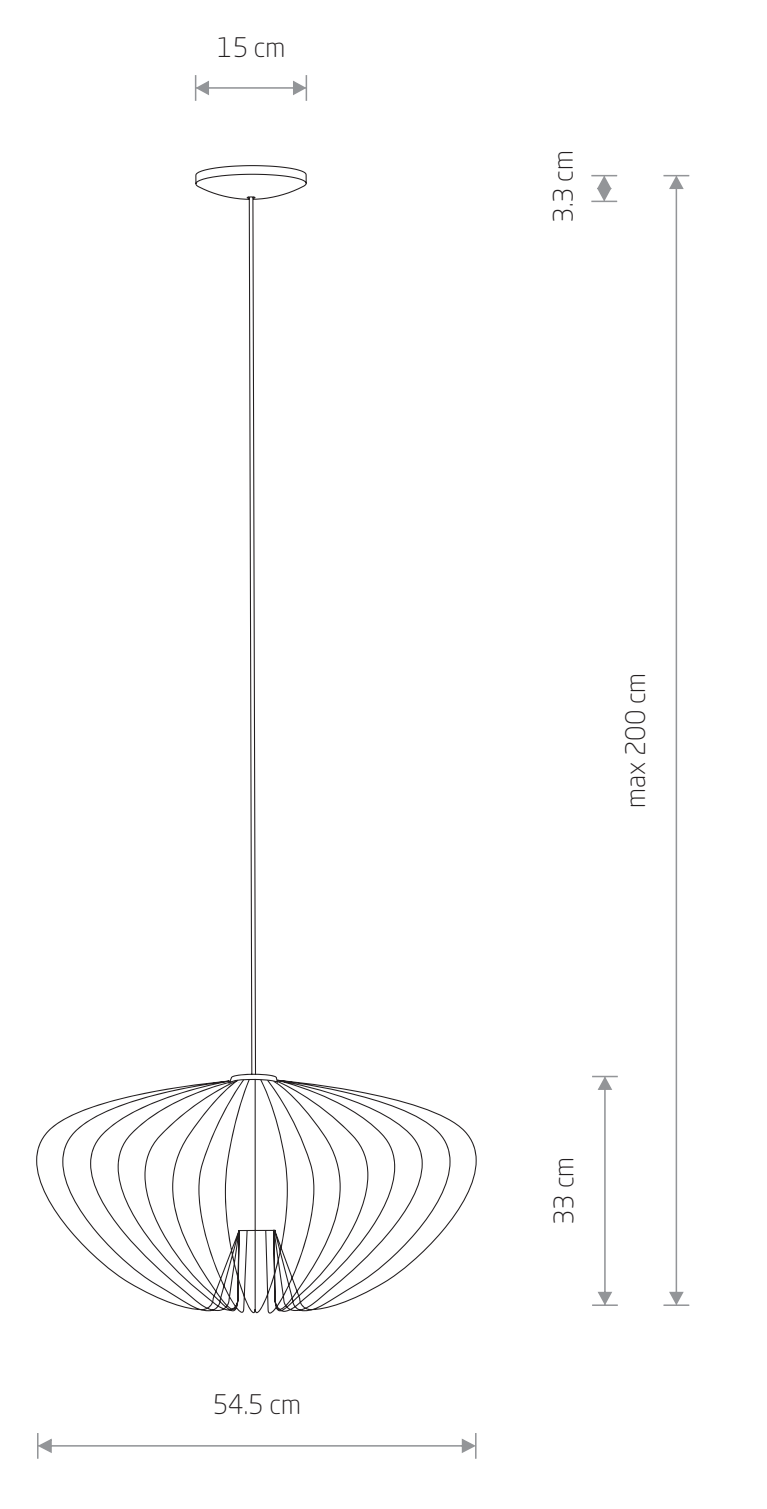

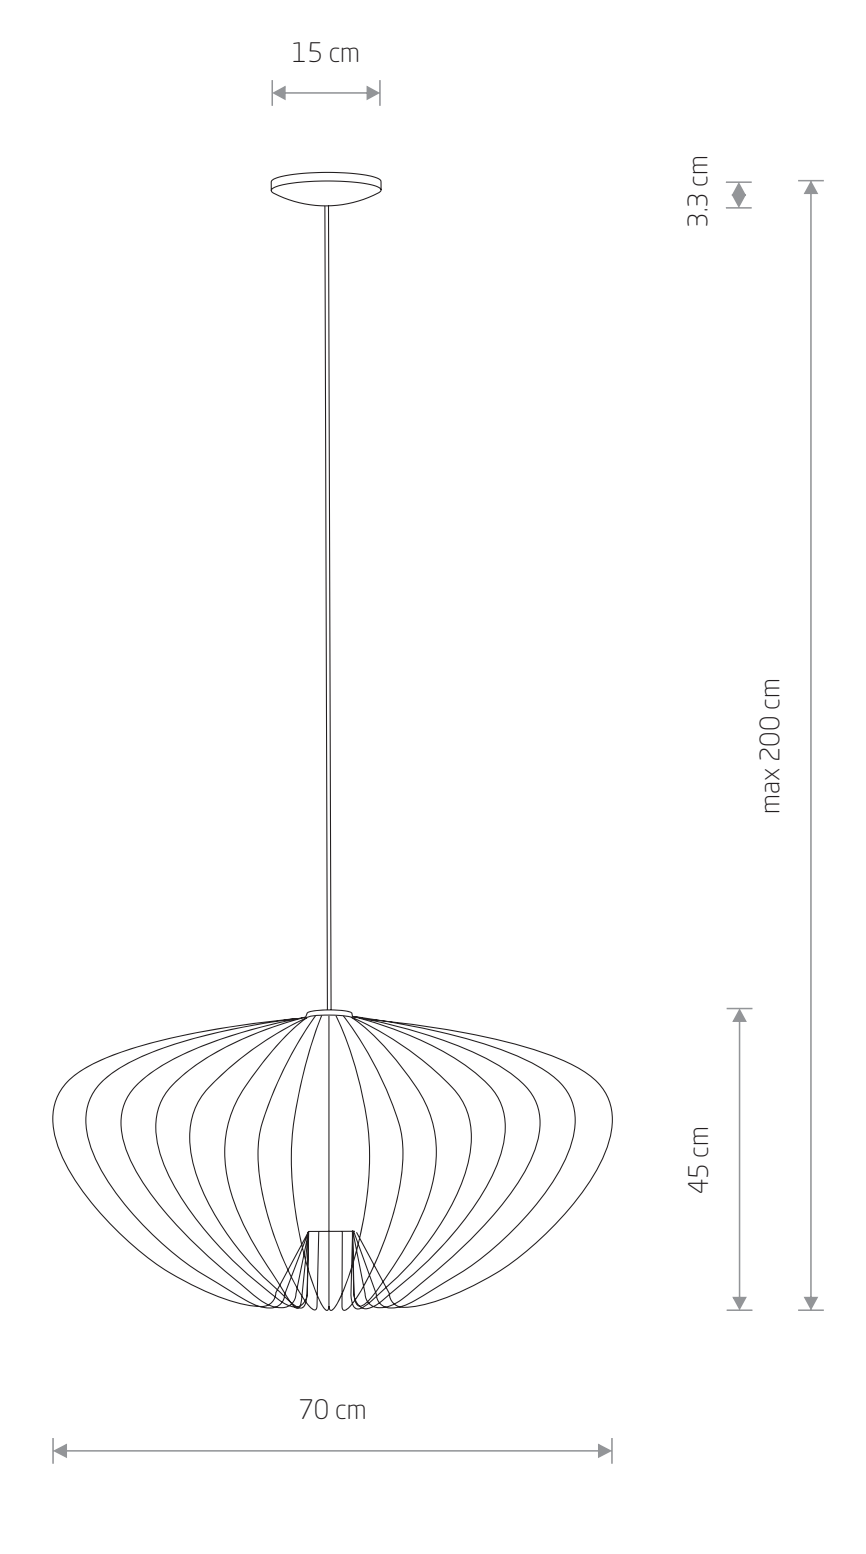PUMPKIN S

painted steel

11242 11243



1xGU10, max 10W only LED

PUMPKIN M

painted steel

11244 11245



1xGU10, max 10W only LED

PUMPKIN L

painted steel

11251 11252



1xGU10, max 10W only LED

SILK GRAY P026 UMBRA GRAY P027

SILK GRAY P026 UMBRA GRAY P027

Nowodvorski LIGHTING


BAR LED M
11400
CIRCOLO LED M
11403
SABER LED L
11381





CIRCOLO LED M


painted aluminum, plastic PC

11402

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11402	21W LED	3000K	660 lm	70 °	>90	~220-230 V, 50/60 Hz	▢	>0.5	IP20	30000h

SILK OLIVE P031



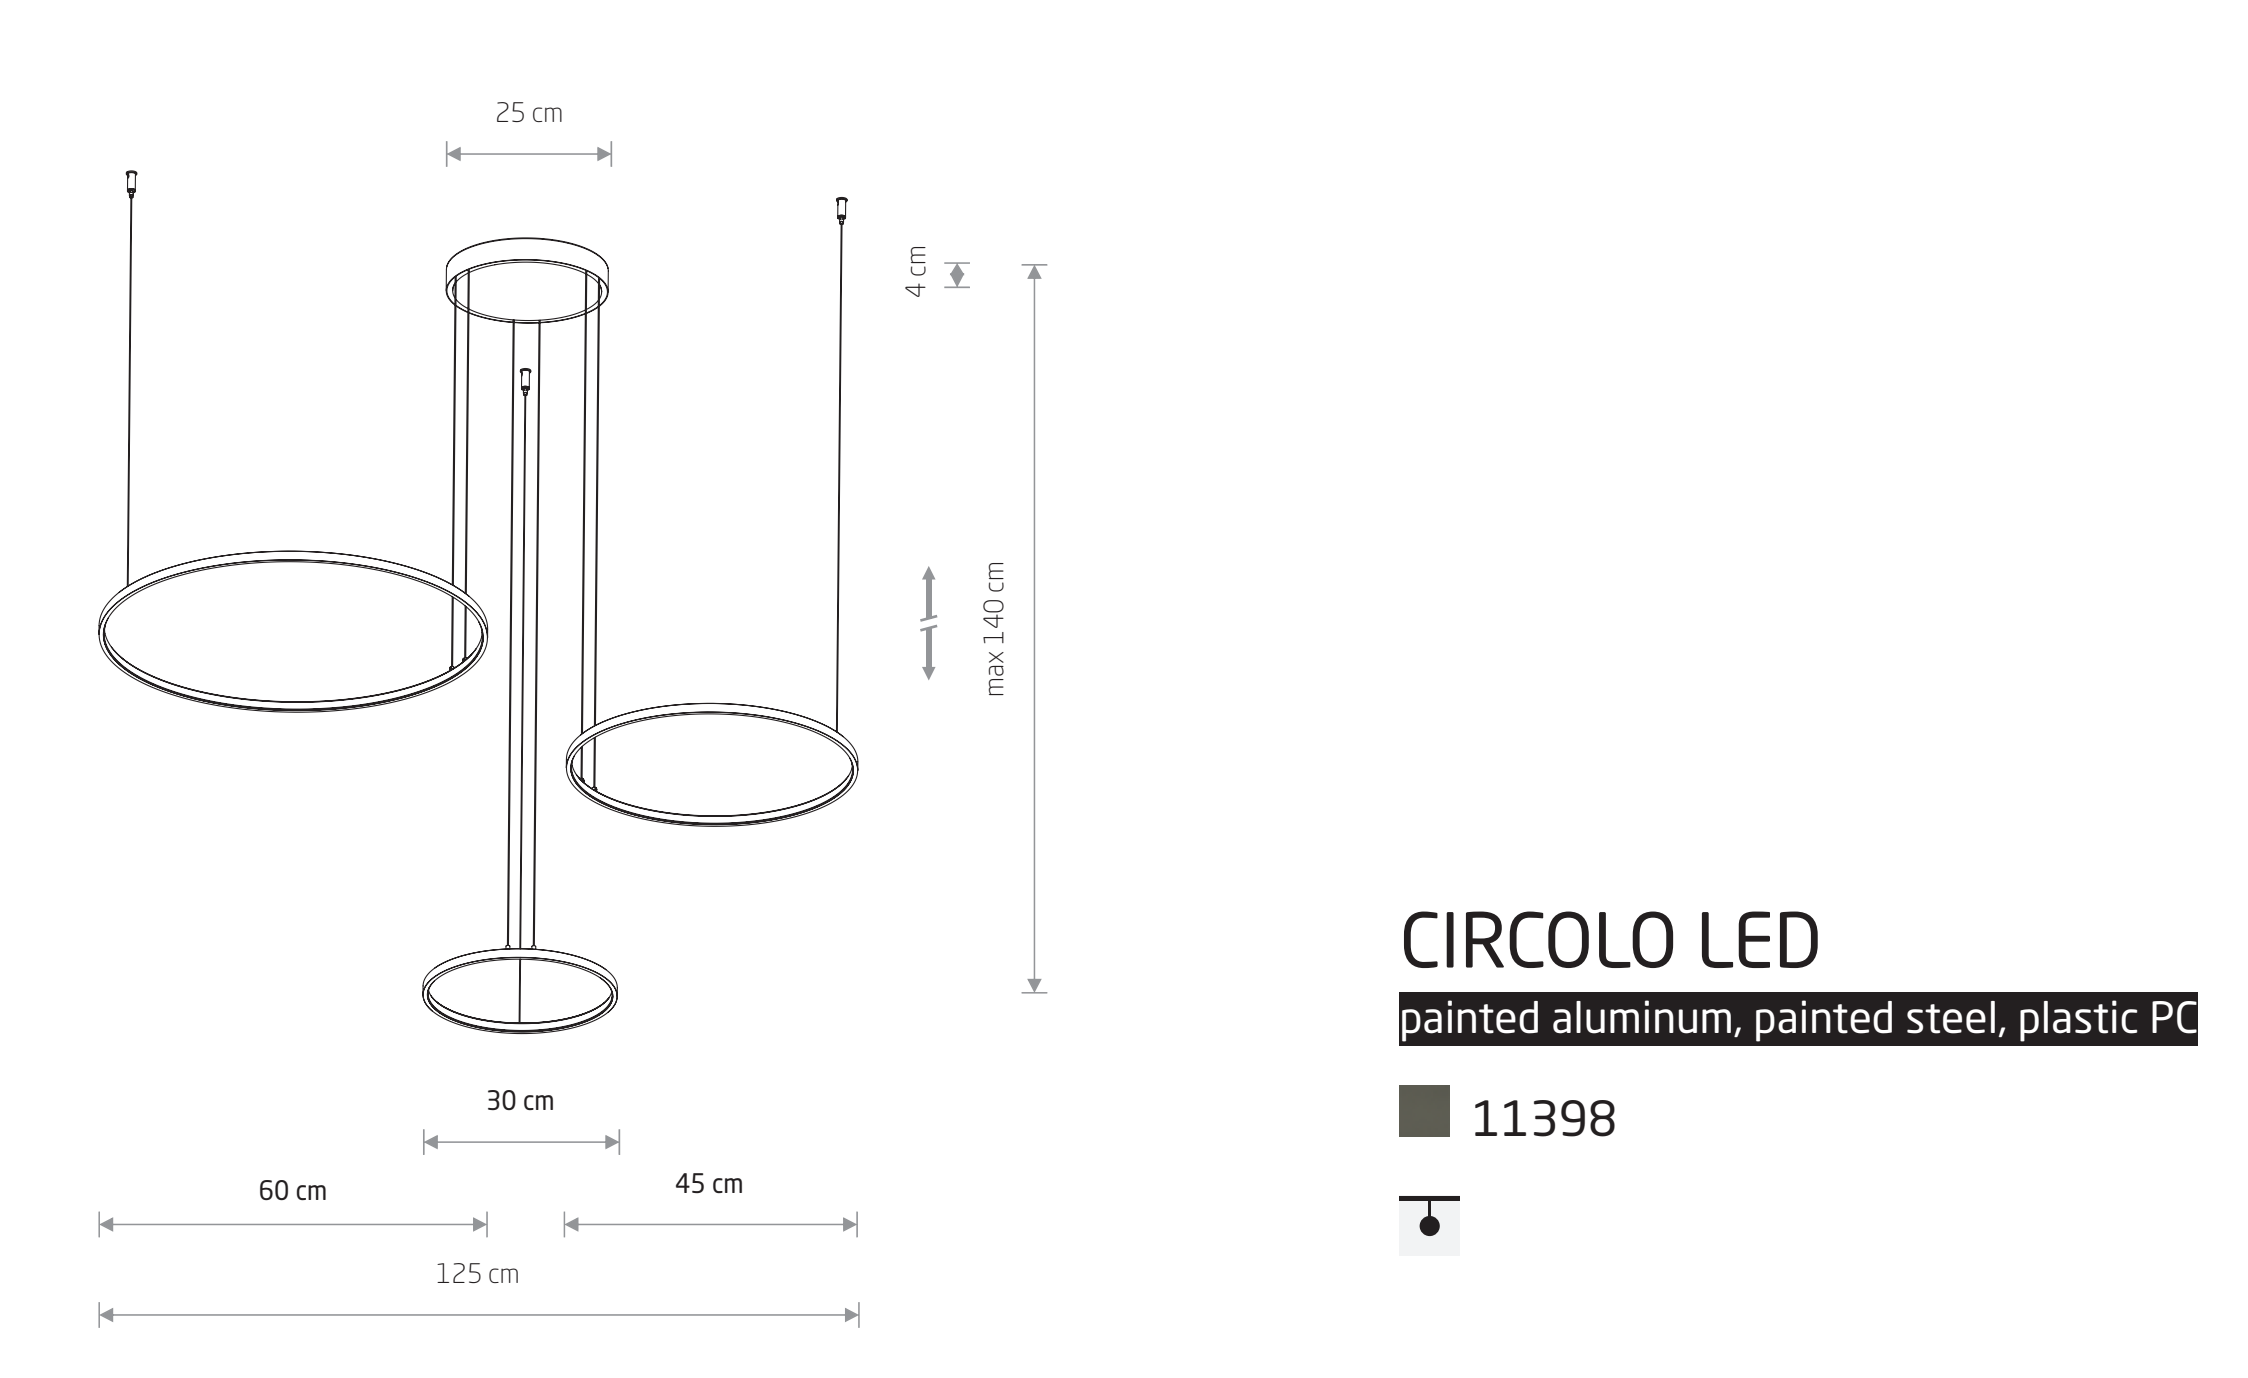

CIRCOLO LED

painted aluminum, painted steel, plastic PC


11398


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11398	45W LED	3000K	1600 lm	70 °	>90	~220-230 V, 50/60 Hz	▢	>0.5	IP20	30000h

SILK OLIVE P031

Nowodvorski LIGHTING

CIRCOLO LED M
11403

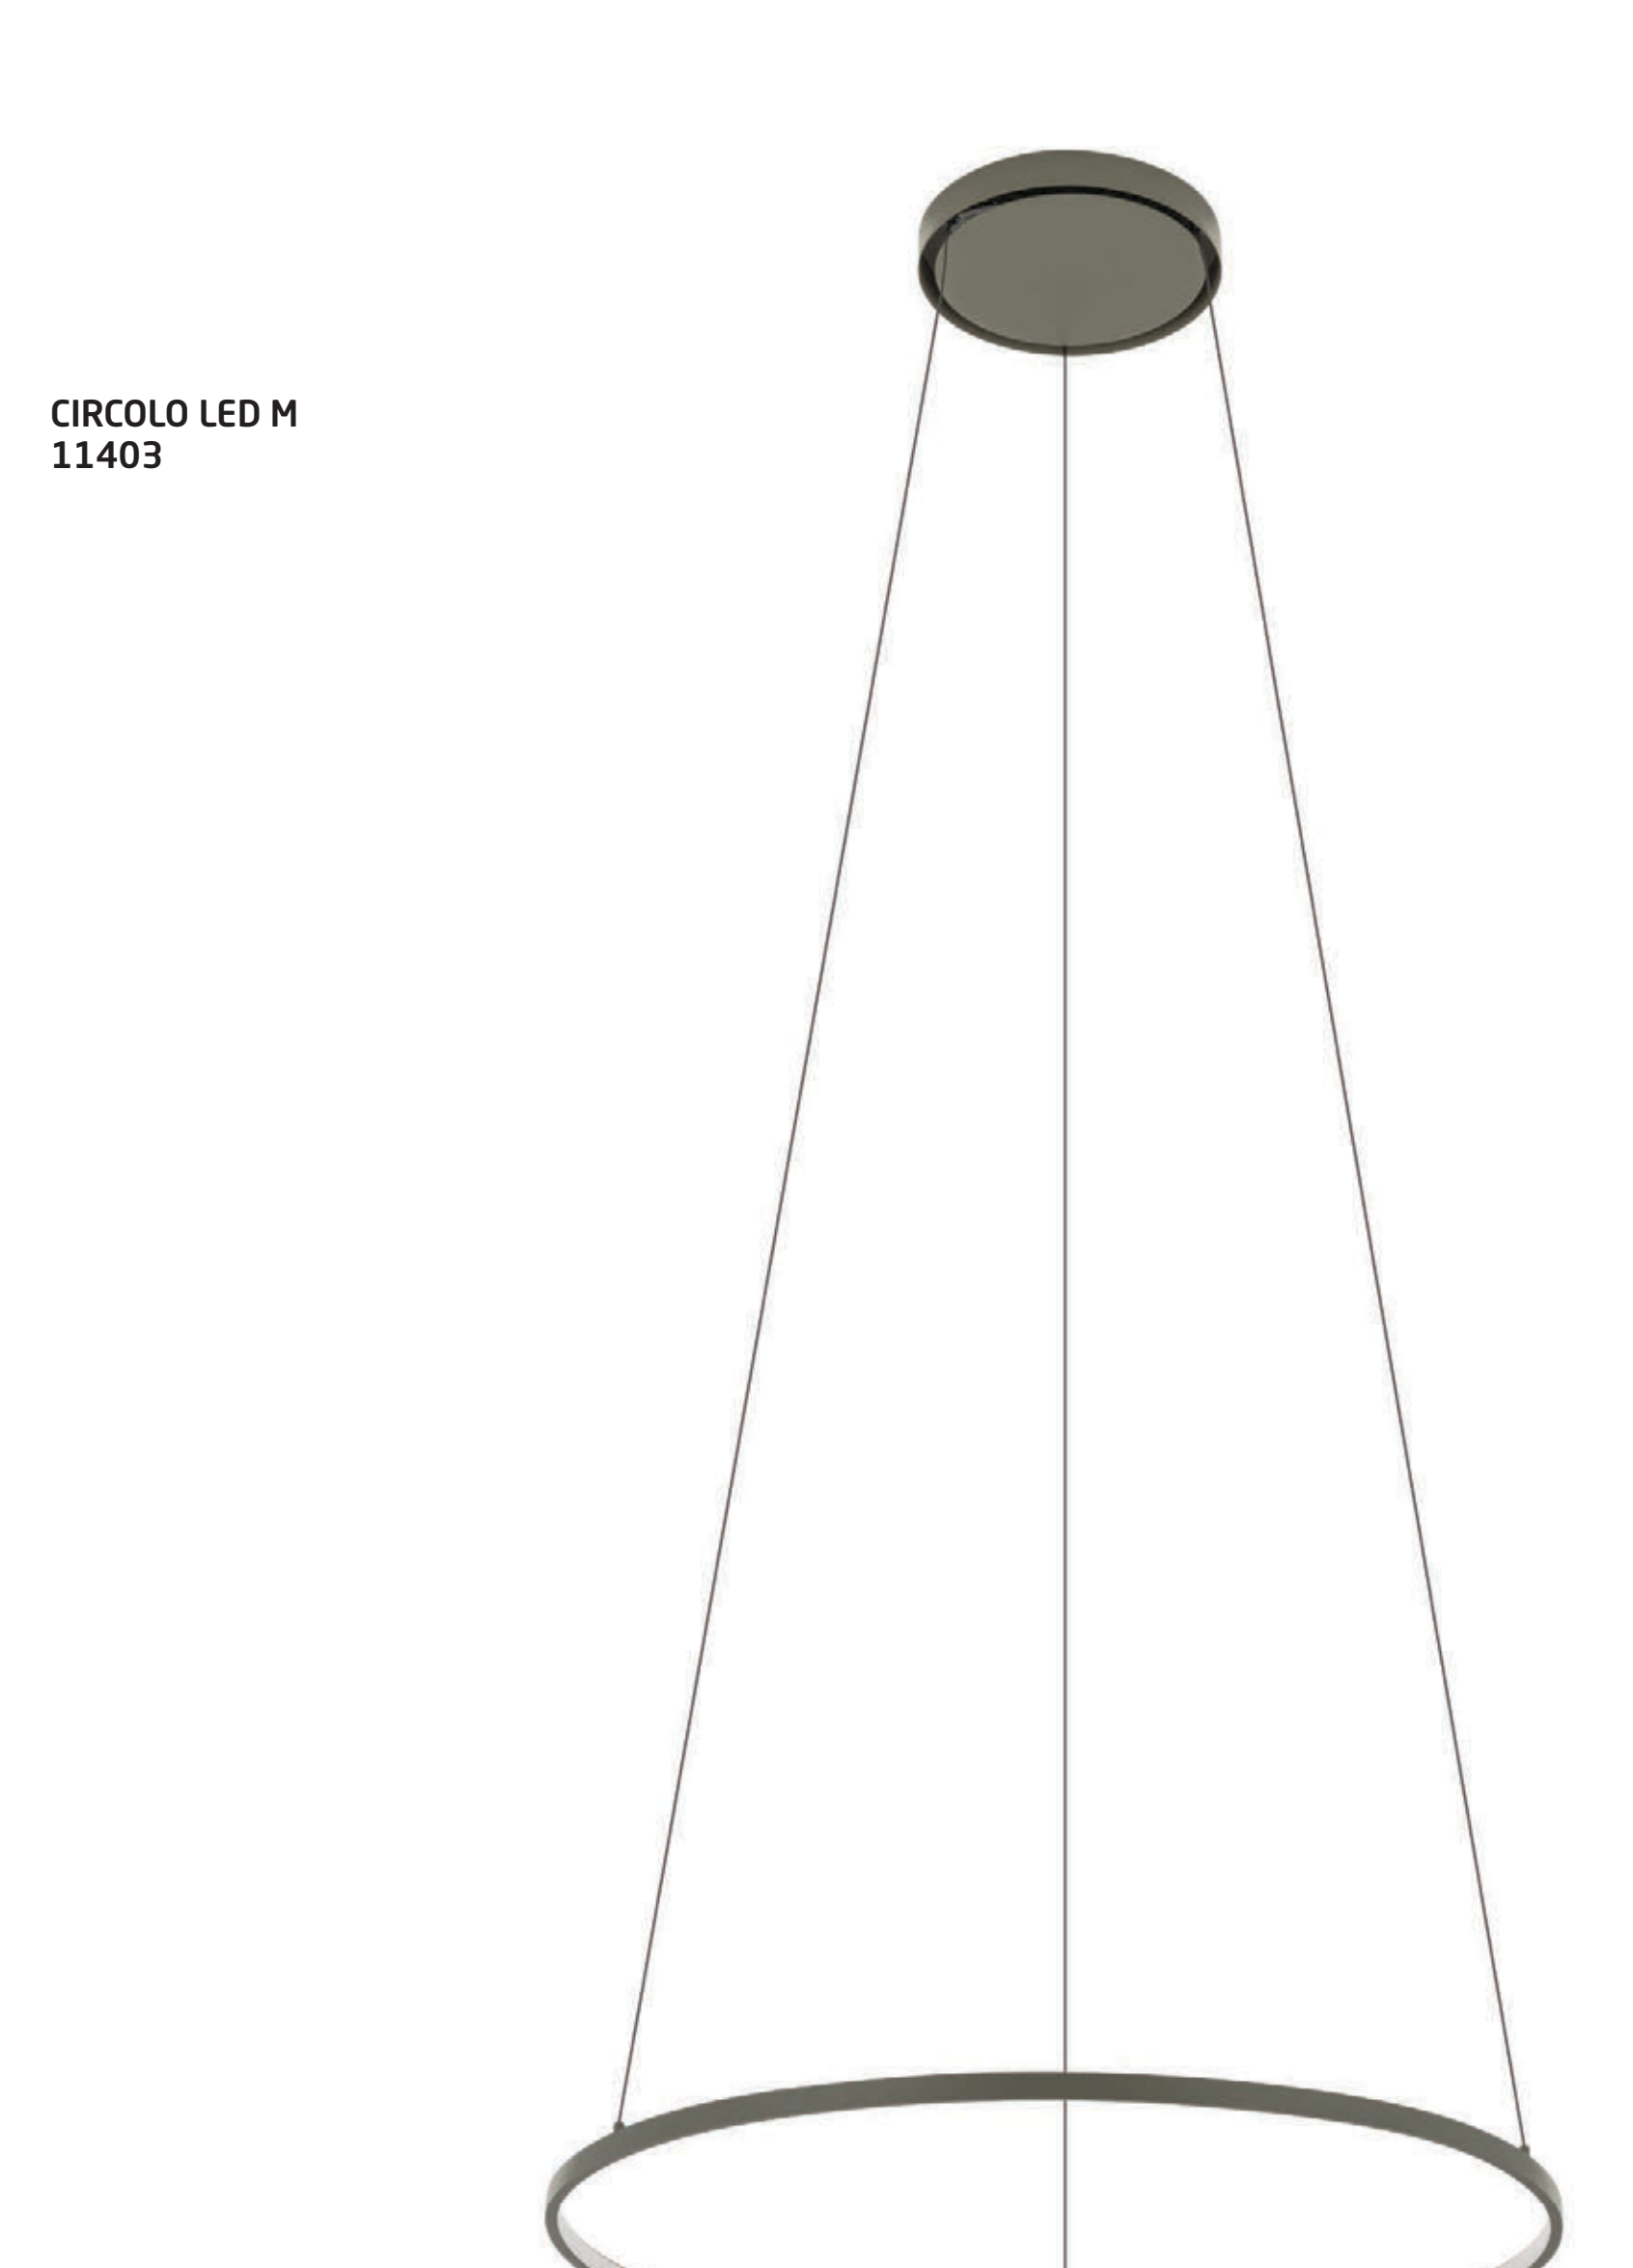

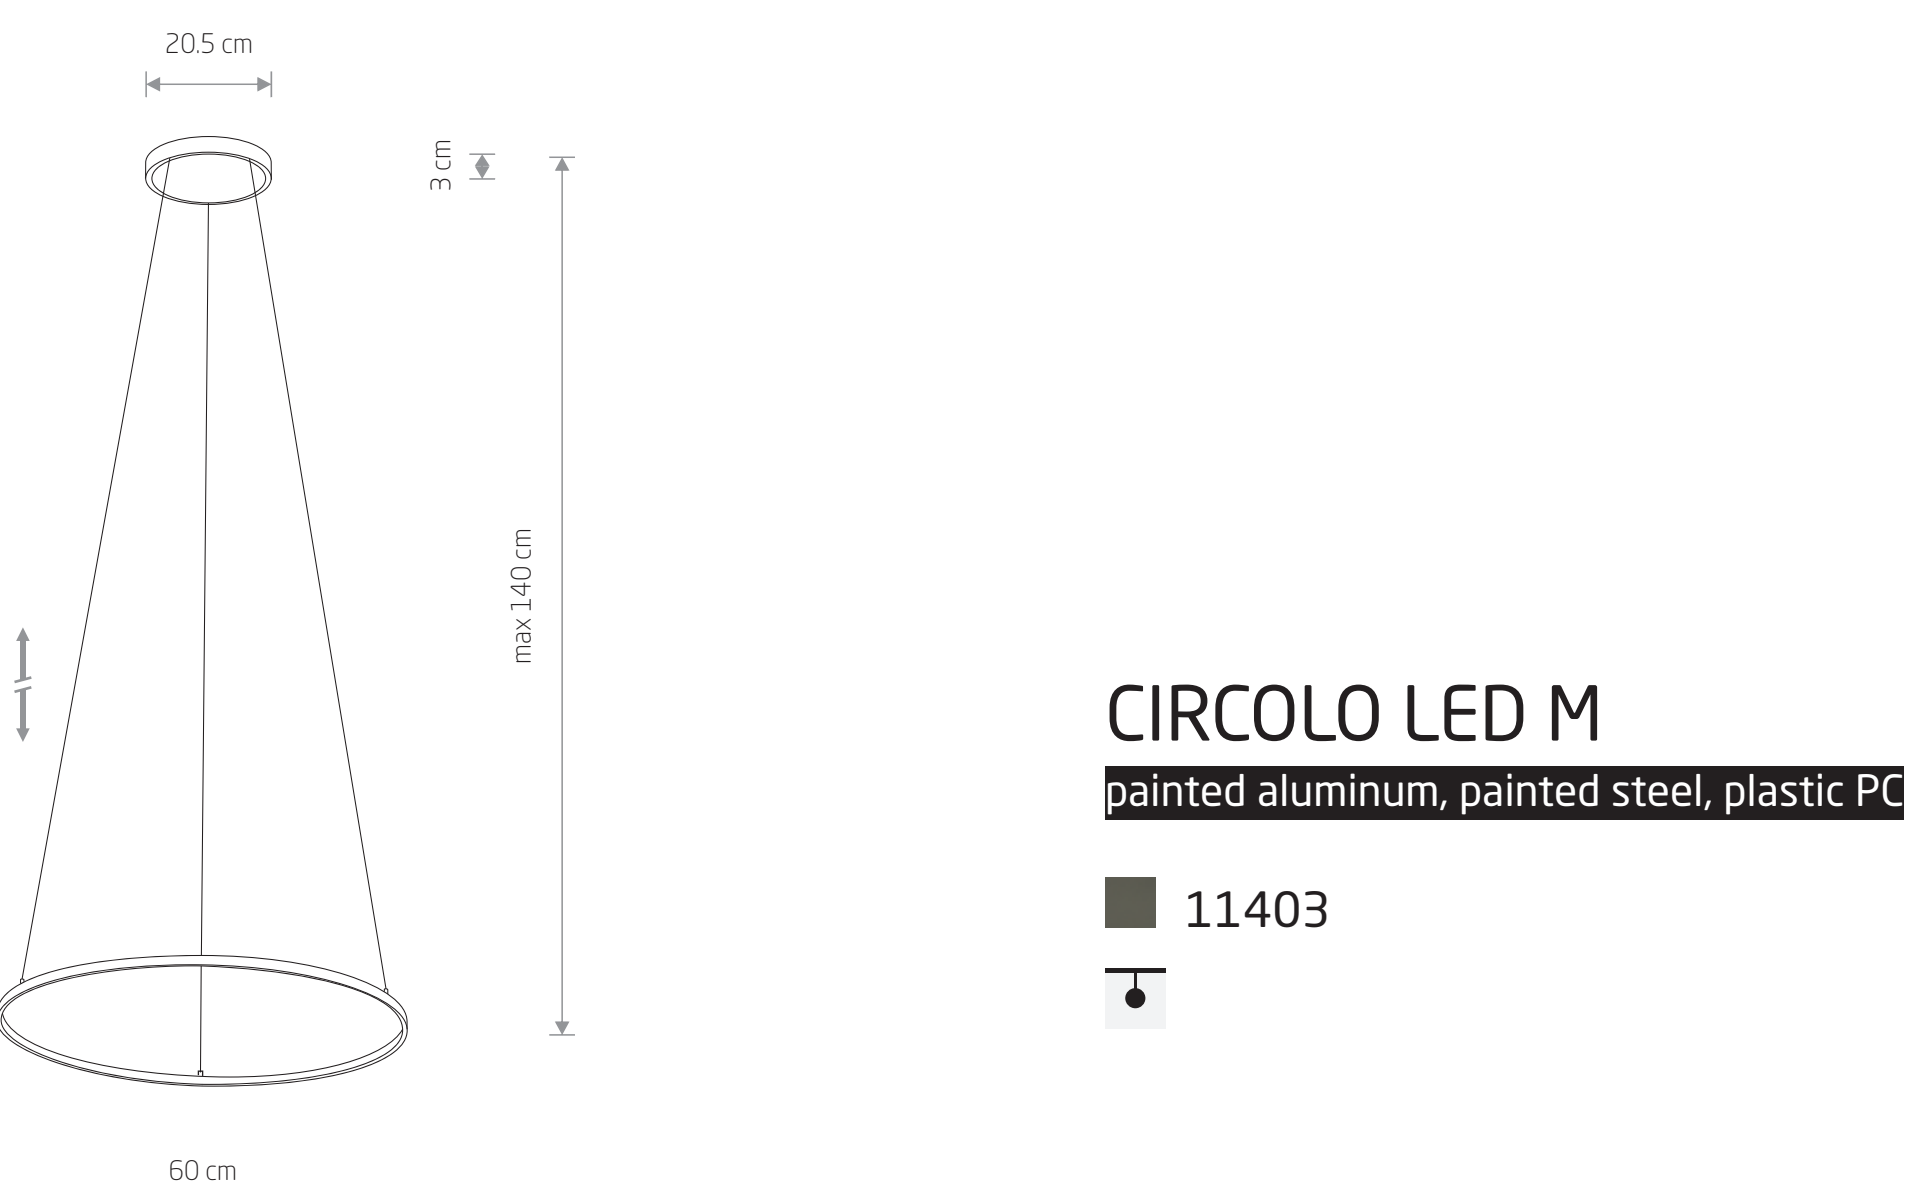

CIRCOLO LED M


painted aluminum, painted steel, plastic PC


11403

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11403	21W LED	3000K	660 lm	70 °	>90	~220-230 V, 50/60 Hz	▢	>0.5	IP20	30000h

SILK OLIVE P031

CIRCOLO LED M
11401

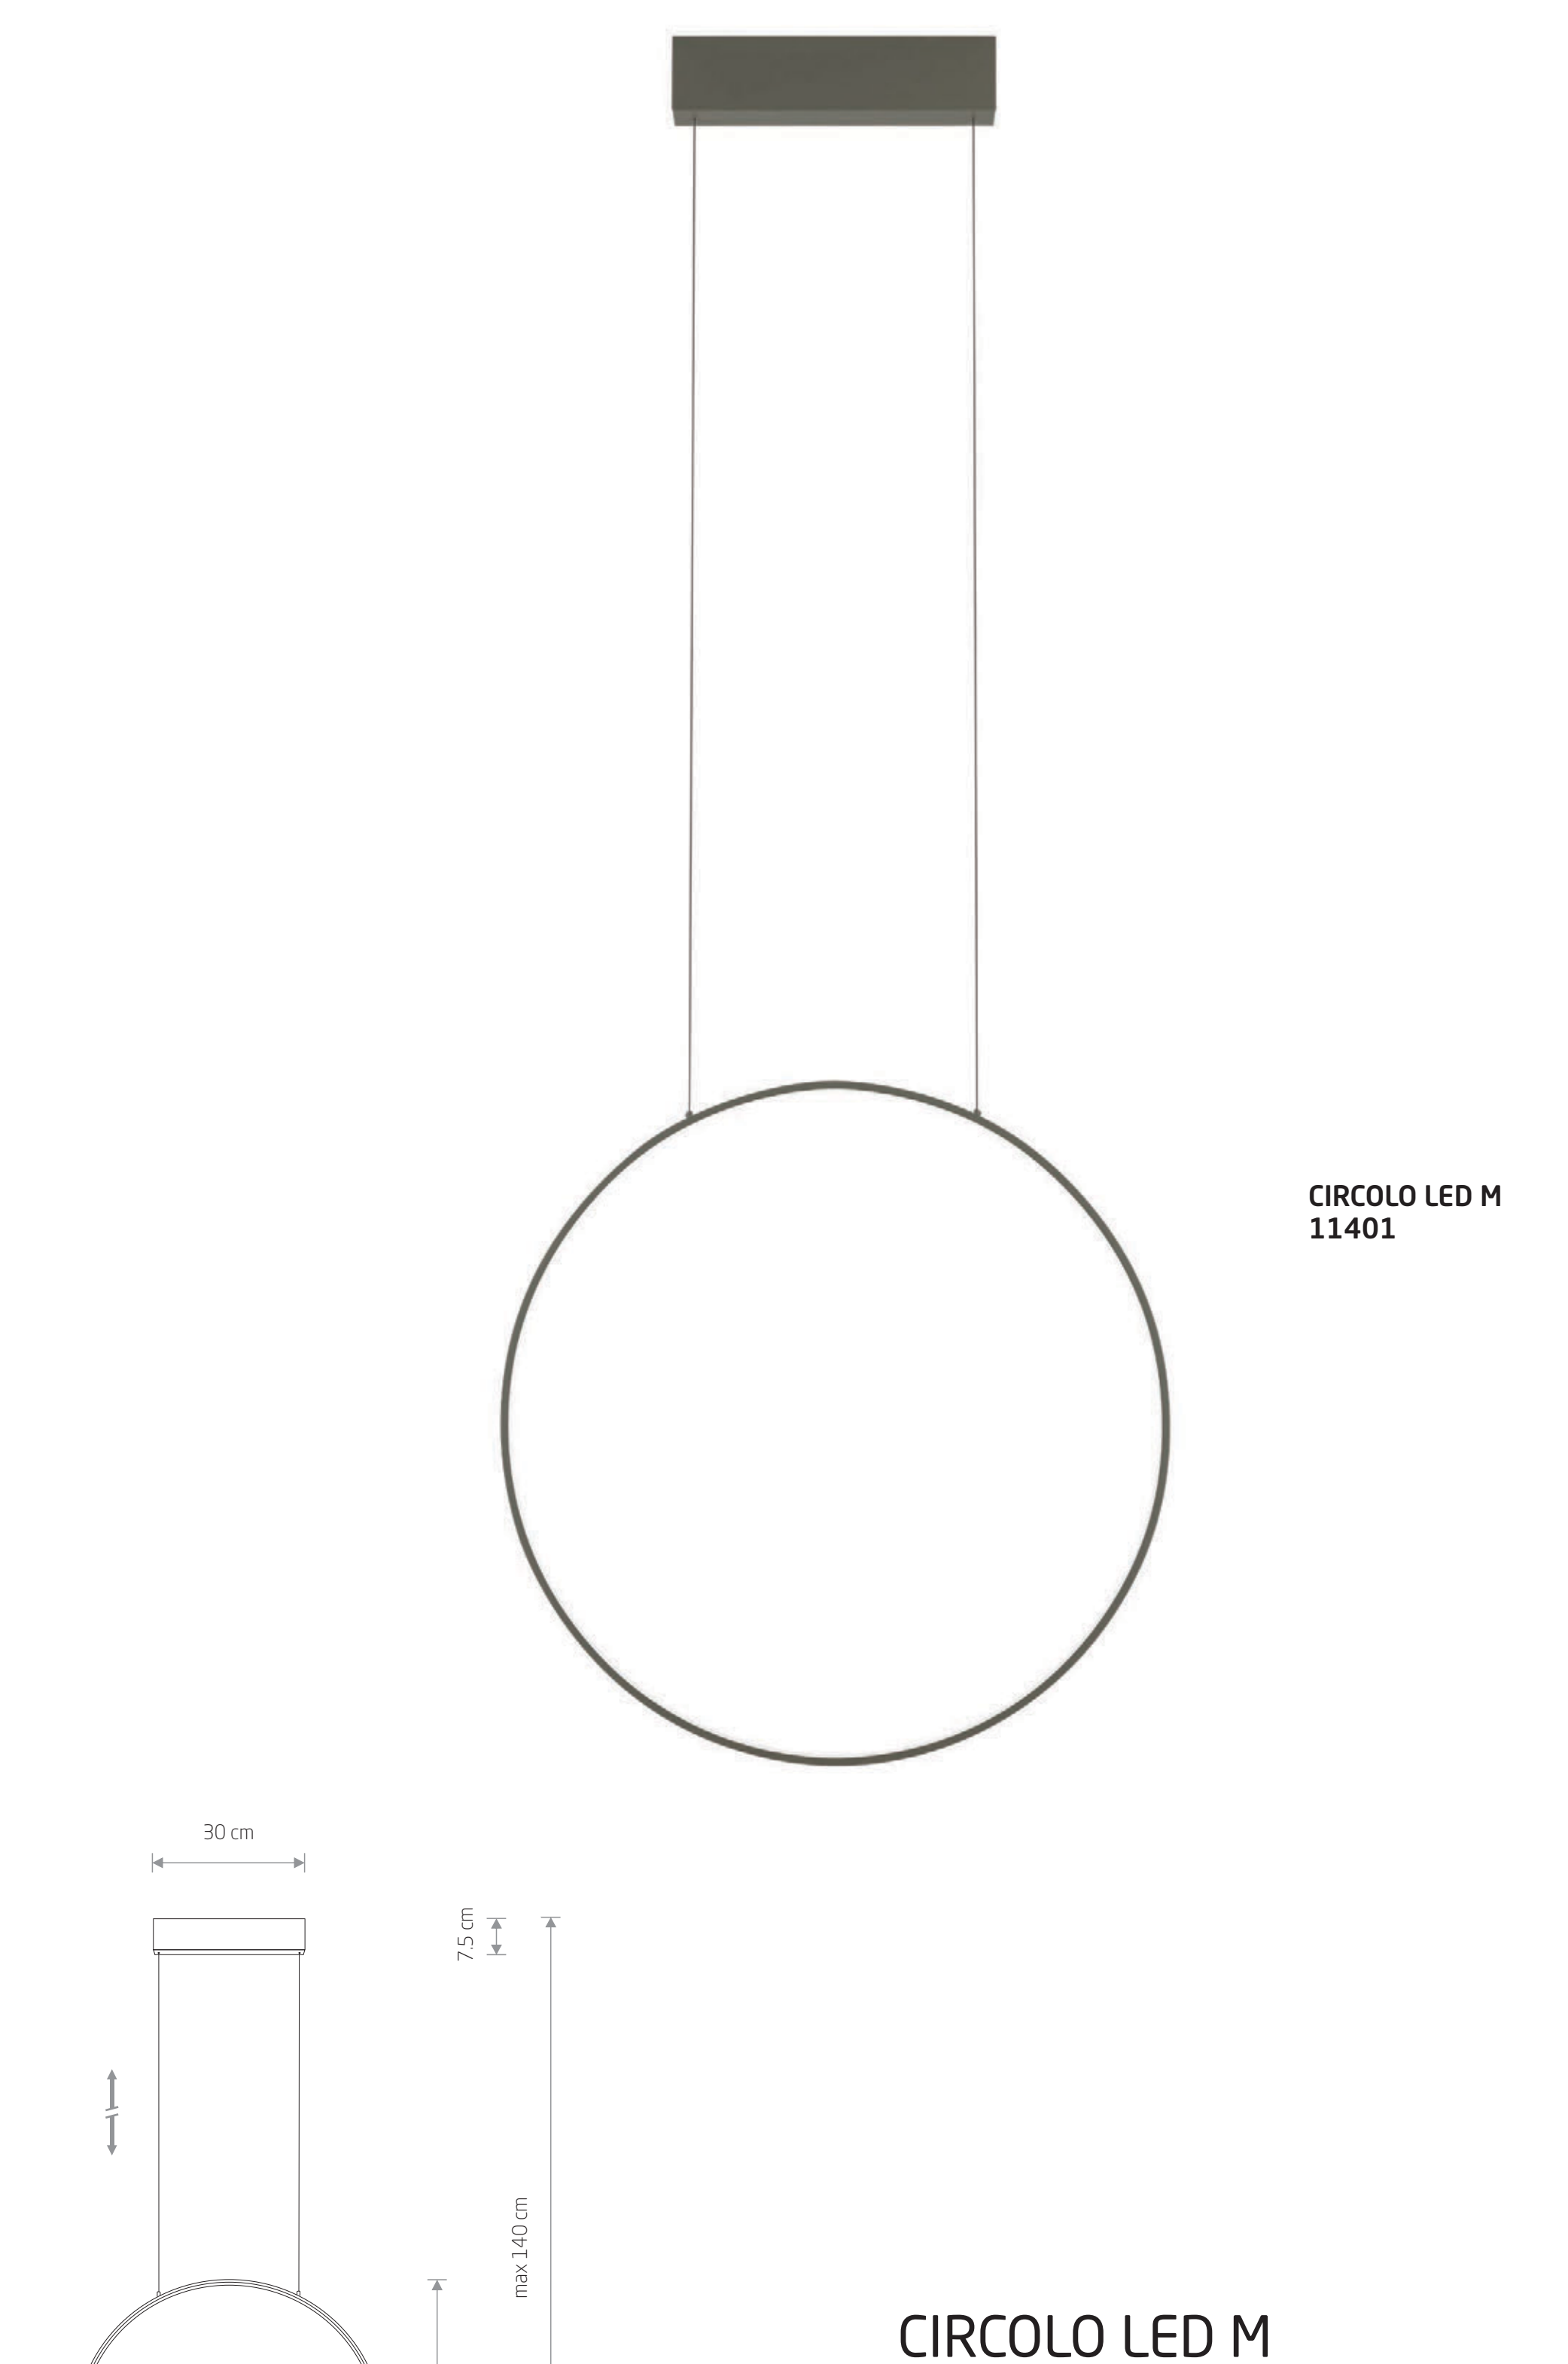

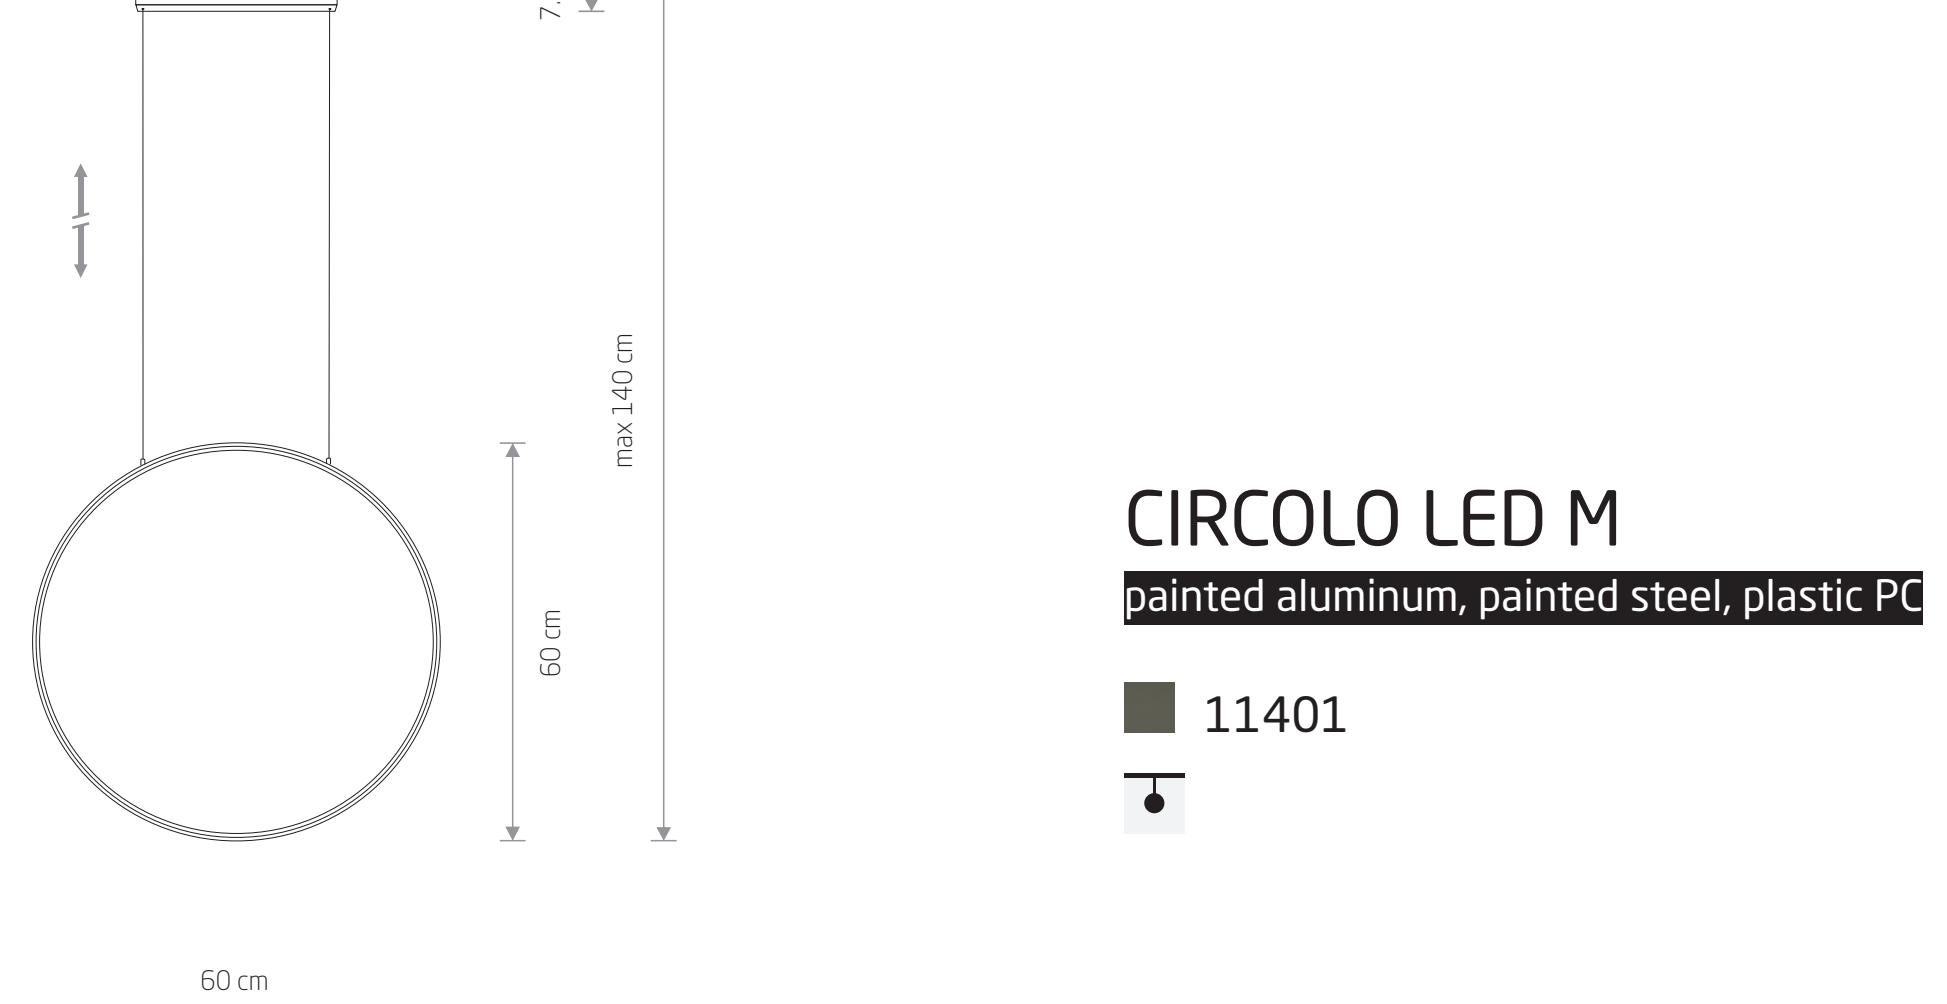

CIRCOLO LED M

painted aluminum, painted steel, plastic PC

11401

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11401	21W LED	3000K	660 lm	70 °	>90	~220-230 V, 50/60 Hz	▢	>0.5	IP20	30000h

SILK OLIVE P031

Nowodvorski LIGHTING

BAR LED M
11400

30 cm
7 cm
max 160 cm
150 cm

BAR LED M


painted aluminum, painted steel, plastic PMMA

11400

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11400	24W LED	3000K	1150 lm	100 °	>80	~220-230 V, 50/60 Hz	◻	>0.5	IP20	30000h

SILK OLIVE P031

SABER LED M
11378




SABER LED M

painted aluminum, painted steel, plastic PC

11378 3000K 11380 4000K

SABER LED L
11381

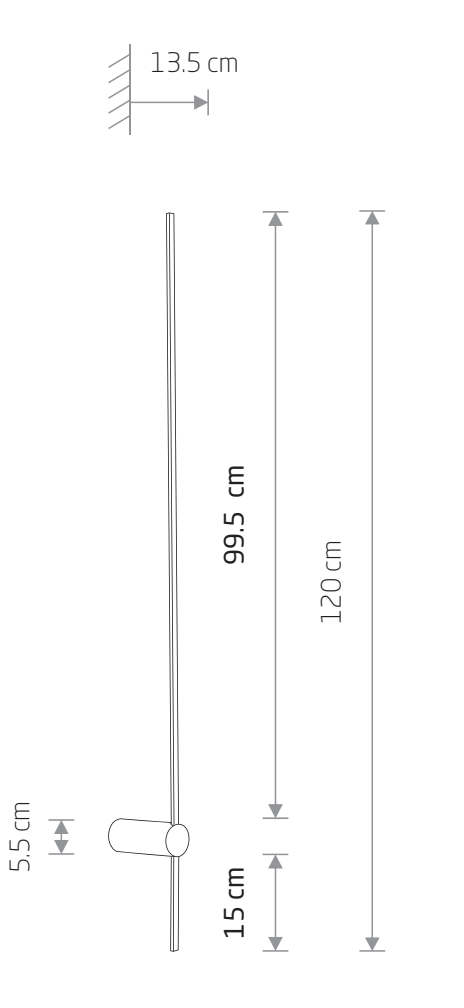

SABER LED L

painted aluminum, painted steel, plastic PC

11381 3000K 11382 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11378	11W LED	3000K	380 lm	100 °	>90	~220-230 V, 50/60 Hz	◻	>0.5	IP20	30000h
11380	11W LED	4000K	410 lm	100 °	>90	~220-230 V, 50/60 Hz	◻	>0.5	IP20	30000h
11381	16W LED	3000K	540 lm	100 °	>90	~220-230 V, 50/60 Hz	◻	>0.5	IP20	30000h
11382	16W LED	4000K	570 lm	100 °	>90	~220-230 V, 50/60 Hz	◻	>0.5	IP20	30000h


SILK OLIVE P031

Nowodvorski LIGHTING



SIMONE
11414
SIMONE
11412


SIMONE
11412
SIMONE
11413
SIMONE
11414
5.5 cm
7.5 cm
max 140 cm
17.5 cm
40 cm
SIMONE
painted steel
11410
11411
11412
11413
11414
1xGX53, max 12W only LED
SIMONE
11413
BLACK P013 RAL 9005
WHITE P004 RAL 9003
TERRACOTTA P028
SAGE GREEN P029
UMBRA BLUE P030


SATELLITE M
11232

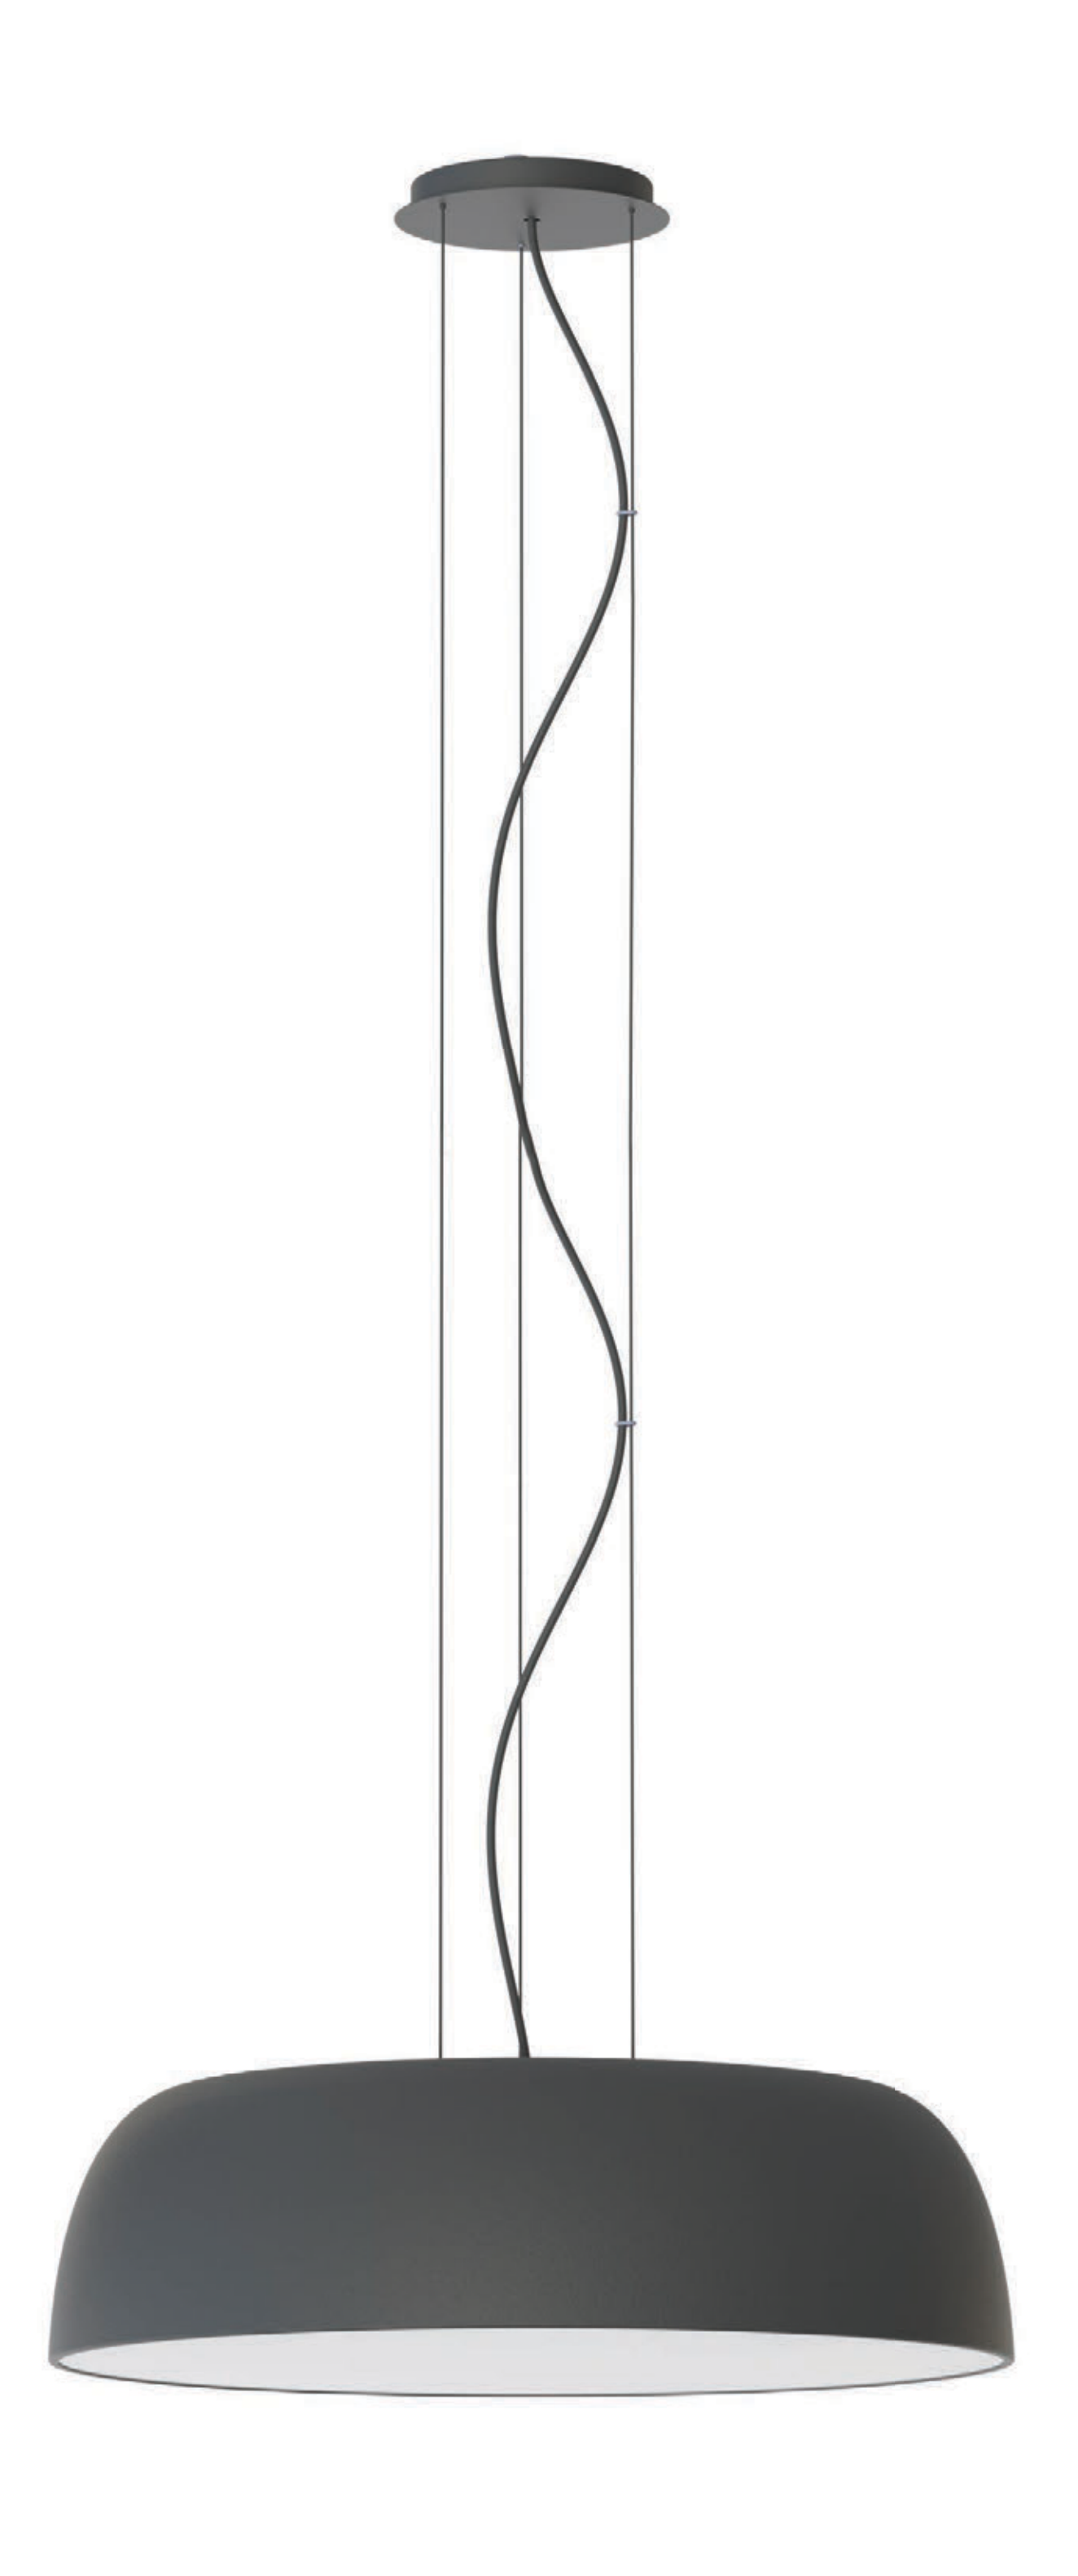

SATELLITE M
11232

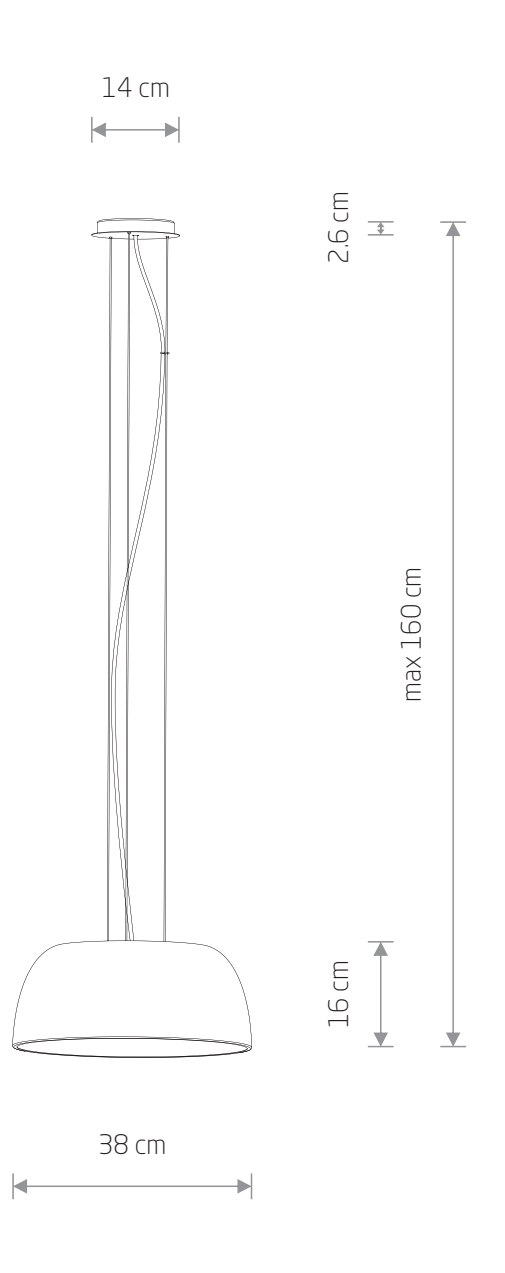


SATELLITE S

painted steel, plastic

11225 11228

11226 11227

3xE27, max 25W only LED

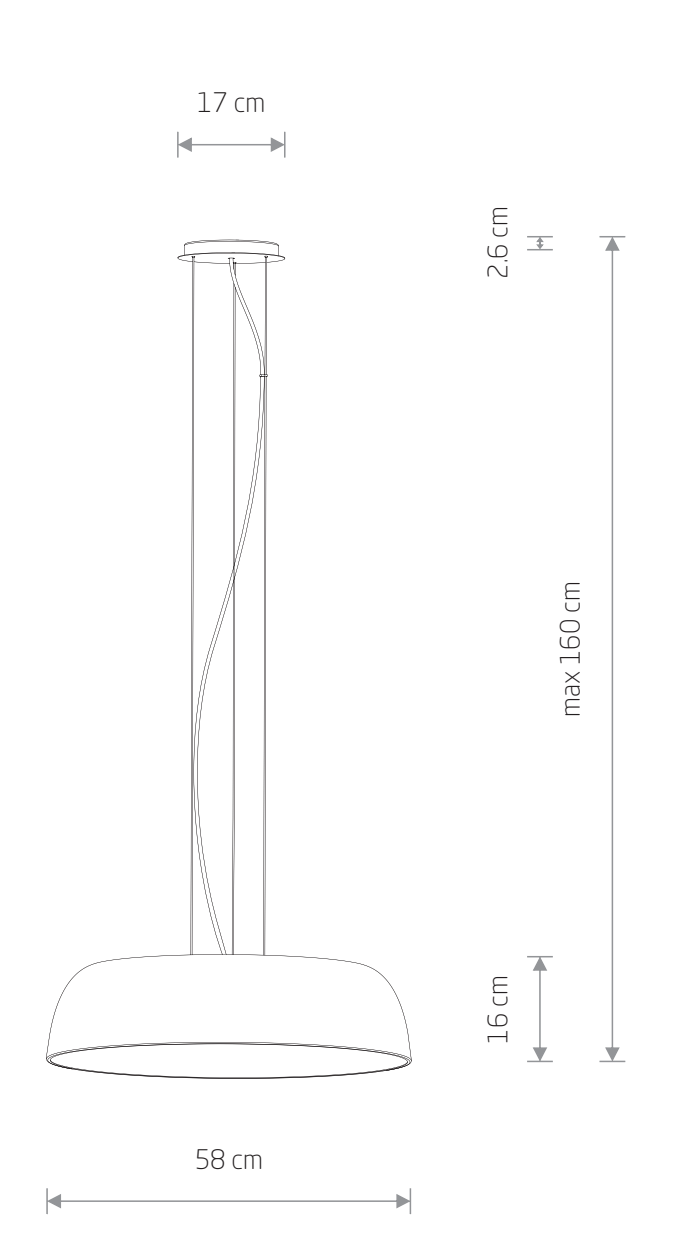

SATELLITE M

painted steel, plastic

11230 11233

11231 11232

7xE27, max 25W only LED



SATELLITE M
11232

BLACK P013 RAL 9005 SILK GRAY P026 UMBRA GRAY P027 WHITE P004 RAL 9003

CTLS SNOWBALL
11296

16 cm
21 cm

CTLS SNOWBALL
plastic PC, glass, painted steel

11296

1xG9, max 12W only LED

CTLS SNOWBALL
11295

16 cm
110 cm

CTLS SNOWBALL
plastic PC, glass, painted steel

11295

1xG9, max 12W only LED

PROFILE SNOWBALL
11298

16 cm
21 cm

PROFILE SNOWBALL
plastic PC, glass, painted steel

11298

1xG9, max 12W only LED

PROFILE SNOWBALL
11297

16 cm
110 cm


PROFILE SNOWBALL
plastic PC, glass, painted steel

11297

1xG9, max 12W only LED


SNOWBALL XIV
11408



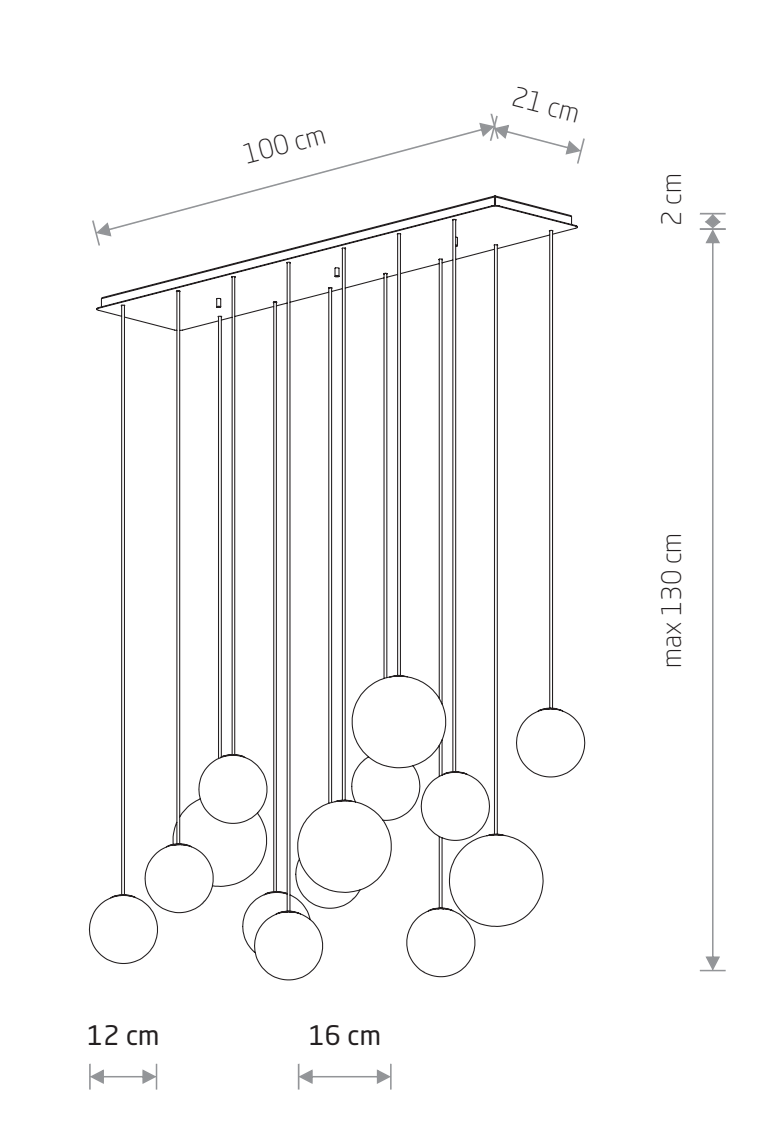

SNOWBALL XIV
painted steel, glass


11408

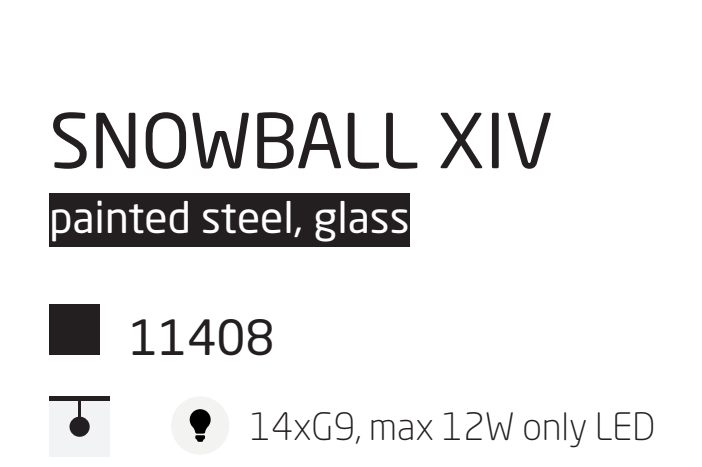


AGNES ROUND LED PRO
10979
AGNES ROUND LED PRO
10981




AGNES ROUND LED PRO
10980



AGNES ROUND LED PRO

painted steel, plastic PMMA


- WHITE 10977 3000K — BLACK 10971 3000K
- WHITE 10978 4000K — BLACK 10972 4000K

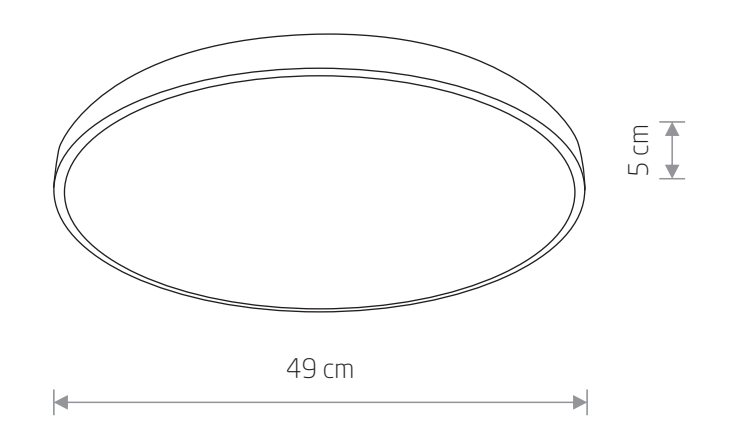

AGNES ROUND LED PRO

painted steel, plastic PMMA

- WHITE 10979 3000K — BLACK 10973 3000K
- WHITE 10980 4000K — BLACK 10974 4000K

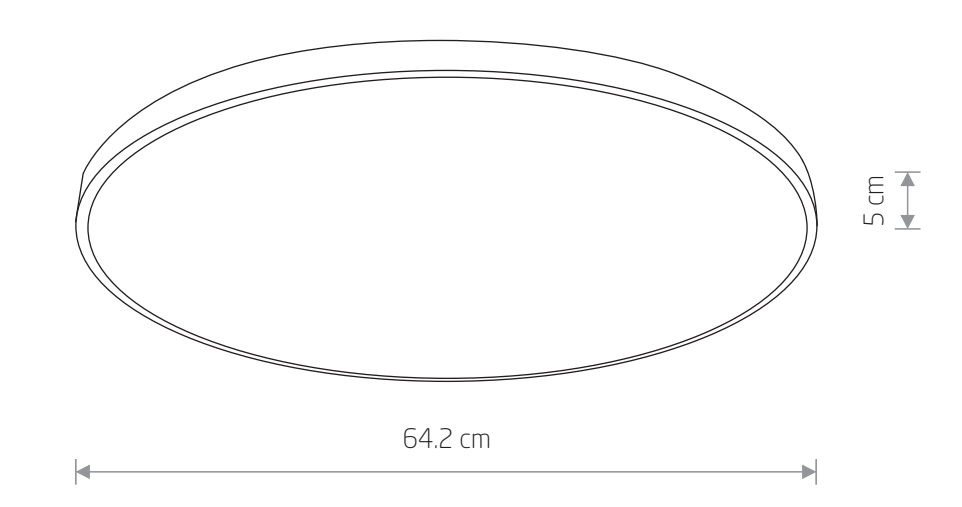

AGNES ROUND LED PRO

painted steel, plastic PMMA


- WHITE 10981 3000K — BLACK 10975 3000K
- WHITE 10982 4000K — BLACK 10976 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
10971	22W LED	3000K	1600 lm	120 °	>80	~220-230 V, 50-60Hz Hz	⏚	IP44	40000h
10972	22W LED	4000K	1800 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h
10973	32W LED	3000K	2600 lm	120 °	>80	~220-230 V, 50-60 Hz	⏚	IP44	40000h
10974	32W LED	4000K	2700 lm	120 °	>80	~220-230 V, 50-60 Hz	⏚	IP44	40000h
10975	64W LED	3000K	5600 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h
10976	64W LED	4000K	5900 lm	120 °	>80	~220-230 V, 50-60 Hz	⏚	IP44	40000h
10977	22W LED	3000K	1800 lm	120 °	>80	~220-230 V, 50-60 Hz	⏚	IP44	40000h
10978	22W LED	4000K	2000 lm	120 °	>80	~220-230 V, 50-60 Hz	⏚	IP44	40000h
10979	32W LED	3000K	2800 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h
10980	32W LED	4000K	3000 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h
10981	64W LED	3000K	5800 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h
10982	64W LED	4000K	6200 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h

WHITE BLACK


AGNES SQUARE LED PRO
10987

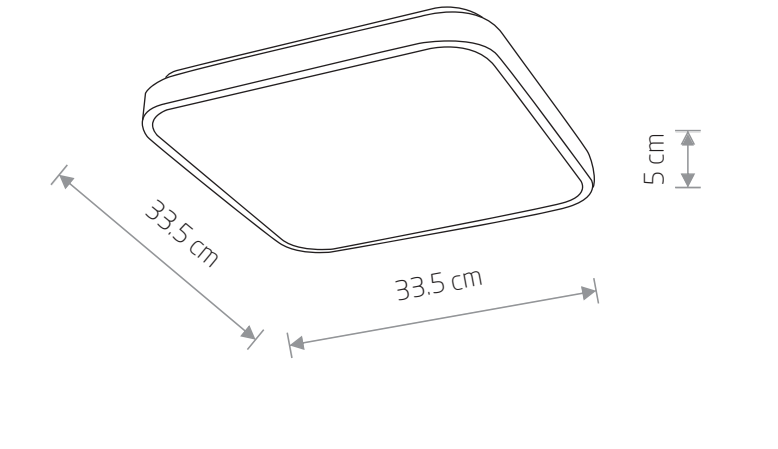

AGNES SQUARE LED PRO

painted steel, plastic PMMA


- WHITE 10989 3000K — BLACK 10983 3000K
- WHITE 10990 4000K — BLACK 10984 4000K

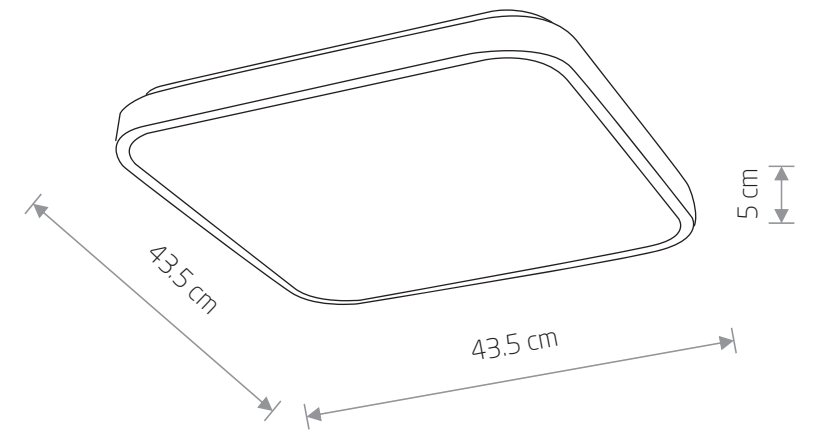

AGNES SQUARE LED PRO

painted steel, plastic PMMA

- WHITE 10991 3000K — BLACK 10985 3000K
- WHITE 10992 4000K — BLACK 10986 4000K

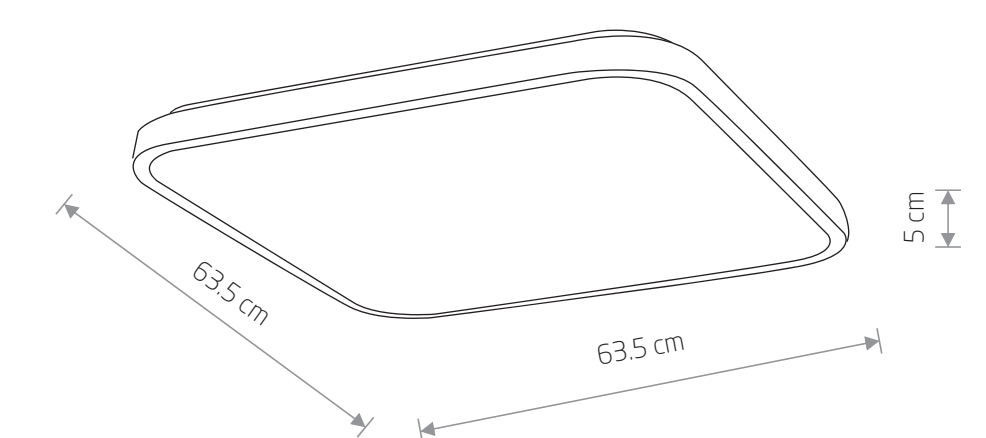

AGNES SQUARE LED PRO


painted steel, plastic PMMA

- WHITE 10993 3000K — BLACK 10987 3000K
- WHITE 10994 4000K — BLACK 10988 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
10983	16W LED	3000K	1200 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h
10984	16W LED	4000K	1300 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h
10985	32W LED	3000K	2700 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h
10986	32W LED	4000K	2800 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h
10987	64W LED	3000K	5600 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h
10988	64W LED	4000K	6000 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h
10989	16W LED	3000K	1400 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h
10990	16W LED	4000K	1500 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h
10991	32W LED	3000K	2900 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h
10992	32W LED	4000K	3100 lm	120 °	>80	~220-230 V, 50/60Hz Hz	⏚	IP44	40000h
10993	64W LED	3000K	6100 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h
10994	64W LED	4000K	6500 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	IP44	40000h

WHITE BLACK

NIKKI ROUND LED
11202








NIKKI ROUND LED

painted steel, plastic PMMA

11200 3000K 11206 3000K

11203 4000K 11210 4000K

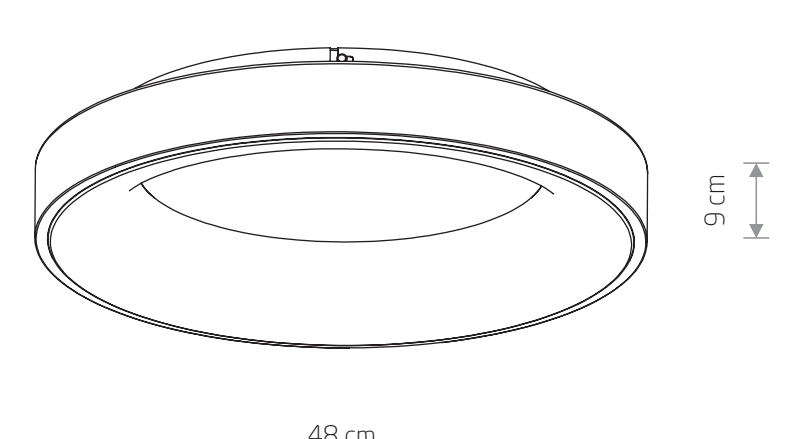

NIKKI ROUND LED

painted steel, plastic PMMA

11201 3000K 11207 3000K

11204 4000K 11211 4000K

9 cm

60 cm

NIKKI ROUND LED

painted steel, plastic PMMA

11202 3000K 11208 3000K

11205 4000K 11212 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
11200	32W LED	3000K	2700 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11201	48W LED	3000K	4200 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11202	60W LED	3000K	5400 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11203	32W LED	4000K	2800 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11204	48W LED	4000K	4300 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11205	60W LED	4000K	5600 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11206	32W LED	3000K	2600 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11207	48W LED	3000K	4000 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11208	60W LED	3000K	5200 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11210	32W LED	4000K	2700 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11211	48W LED	4000K	4200 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h
11212	60W LED	4000K	5400 lm	120°	>80	~220-230 V, 50/60 Hz	☐	IP20	40000h

WHITE BLACK



OUTLINE LED L
11362



OUTLINE LED S
11360

OUTLINE LED M
11361


OUTLINE LED L
11362



OUTLINE LED S

painted aluminum, plastic PC


11360

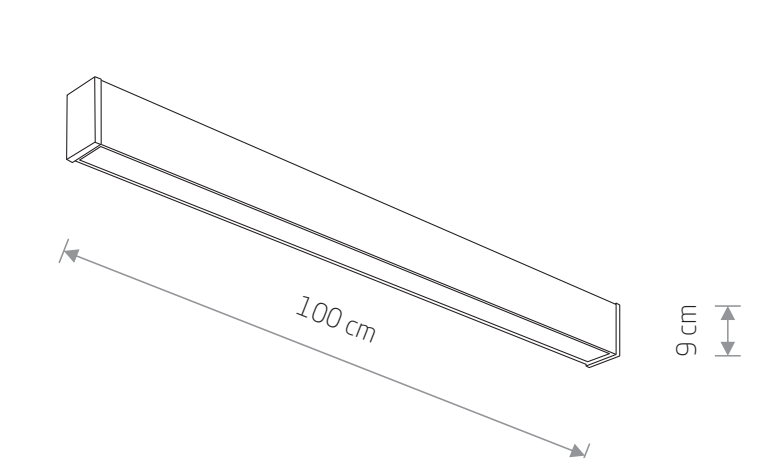

OUTLINE LED M

painted aluminum, plastic PC

11361

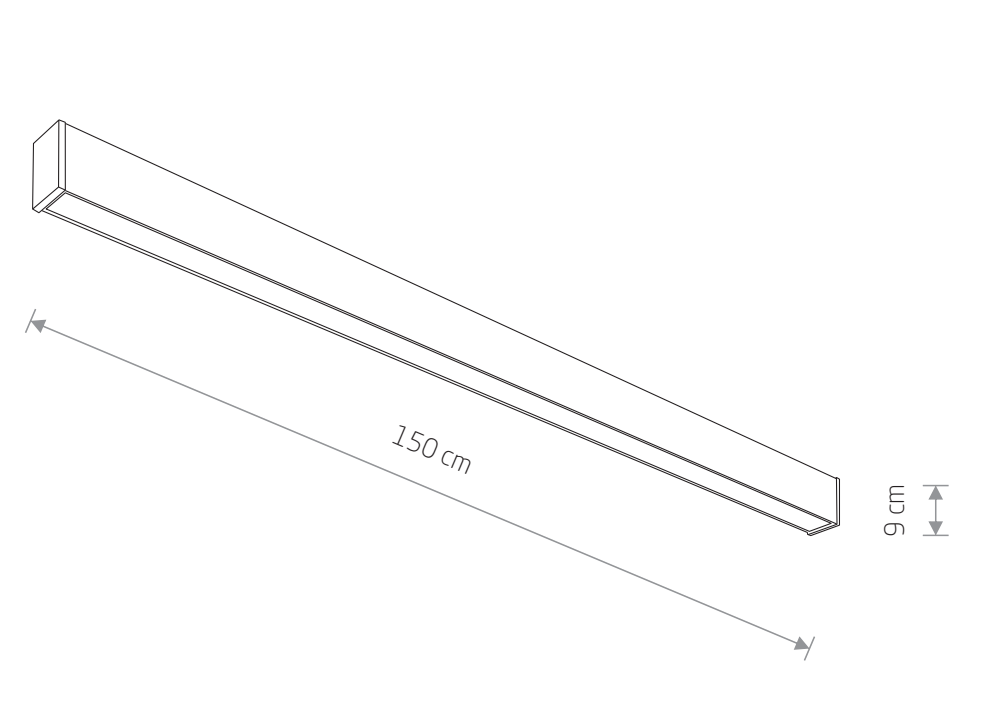



OUTLINE LED L

painted aluminum, plastic PC


11362

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11360	20W LED	3000K	1200 lm	100 °	>80	~220-230 V, 50/60 Hz	⏚	>0,9	IP44	30000h
11361	35W LED	3000K	1800 lm	100 °	>80	~220-230 V, 50/60 Hz	⏚	>0.9	IP44	30000h
11362	50W LED	3000K	3000 lm	100 °	>80	~220-230 V, 50/60 Hz	⏚	>0.9	IP44	30000h

BLACK

OUTLINE LED S
11360

Nowodvorski LIGHTING

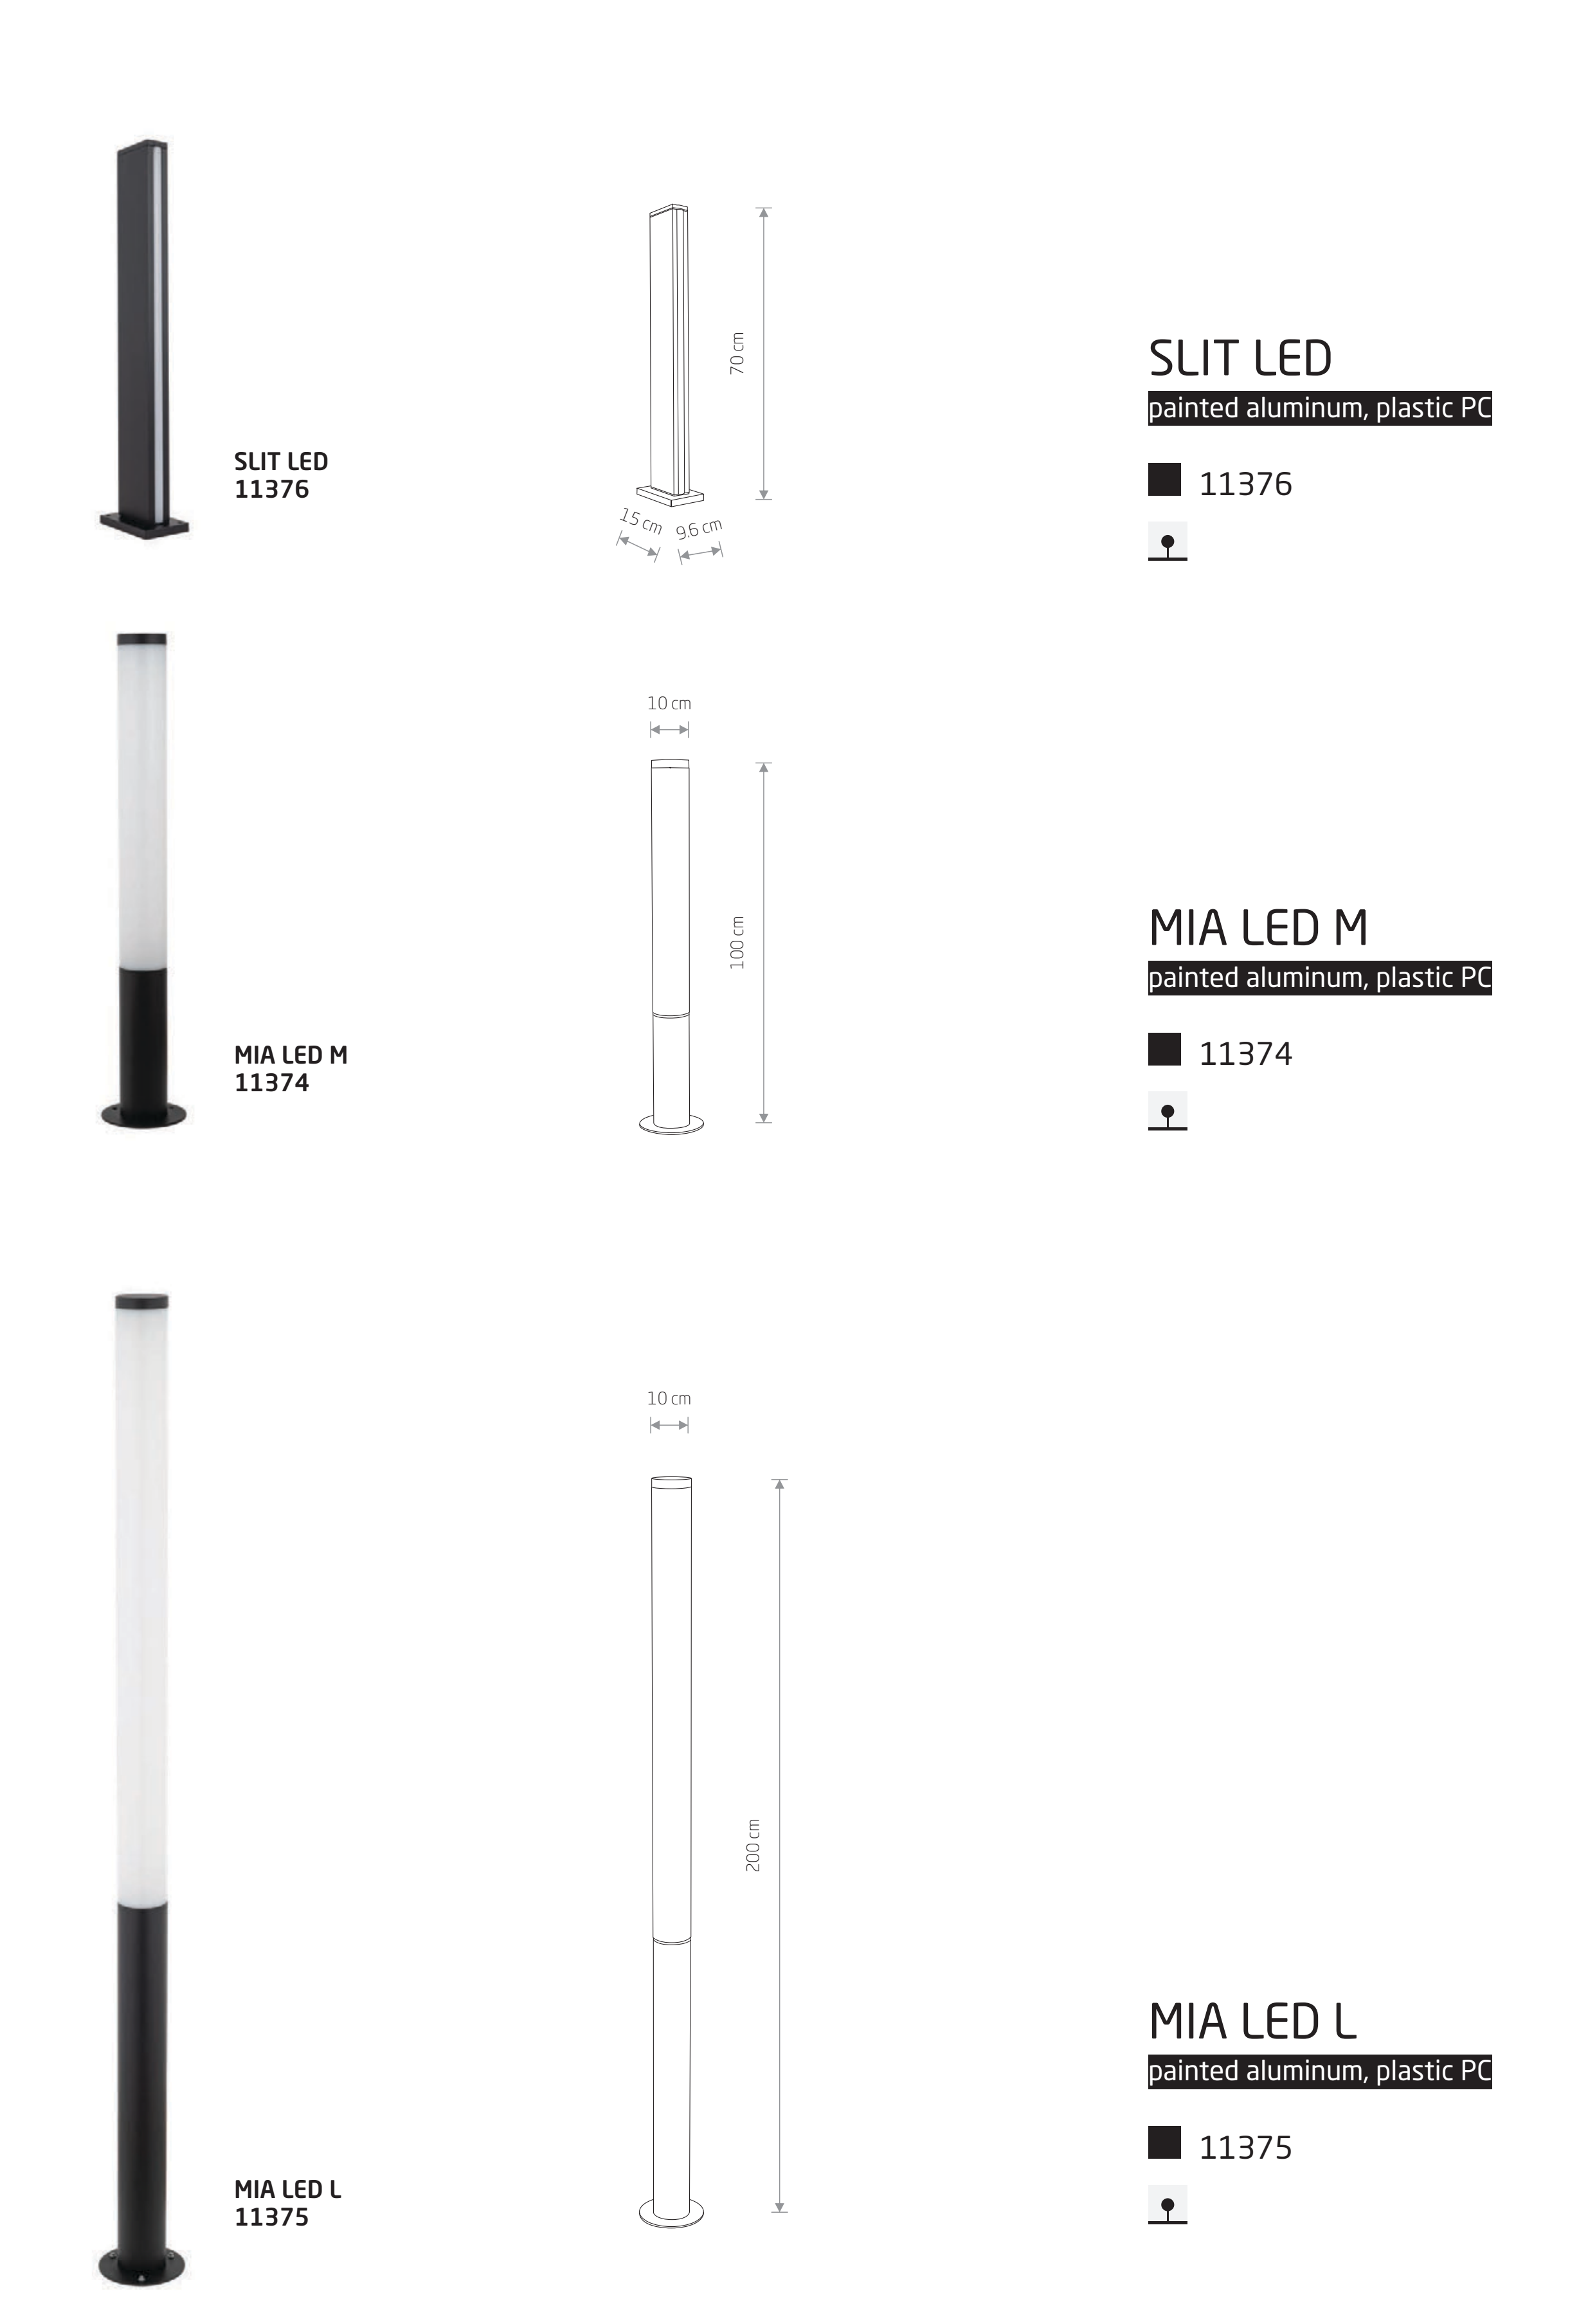

SLIT LED

painted aluminum, plastic PC

■ 11376

MIA LED M

painted aluminum, plastic PC

■ 11374

MIA LED L


painted aluminum, plastic PC

■ 11375

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11376	12W LED	3000K	600 lm	100 °	>80	~220-230 V, 50/60 Hz	⏚	>0.5	IP54	30000h
11374	30W LED	3000K	2500 lm	70 °	>80	~220-230 V, 50/60 Hz	⏚	>0.9	IP54	30000h
11375	100W LED	3000K	7800 lm	70 °	>80	~220-230 V, 50/60 Hz	⏚	>0.9	IP54	30000h


■ BLACK


MIA LED M
11374

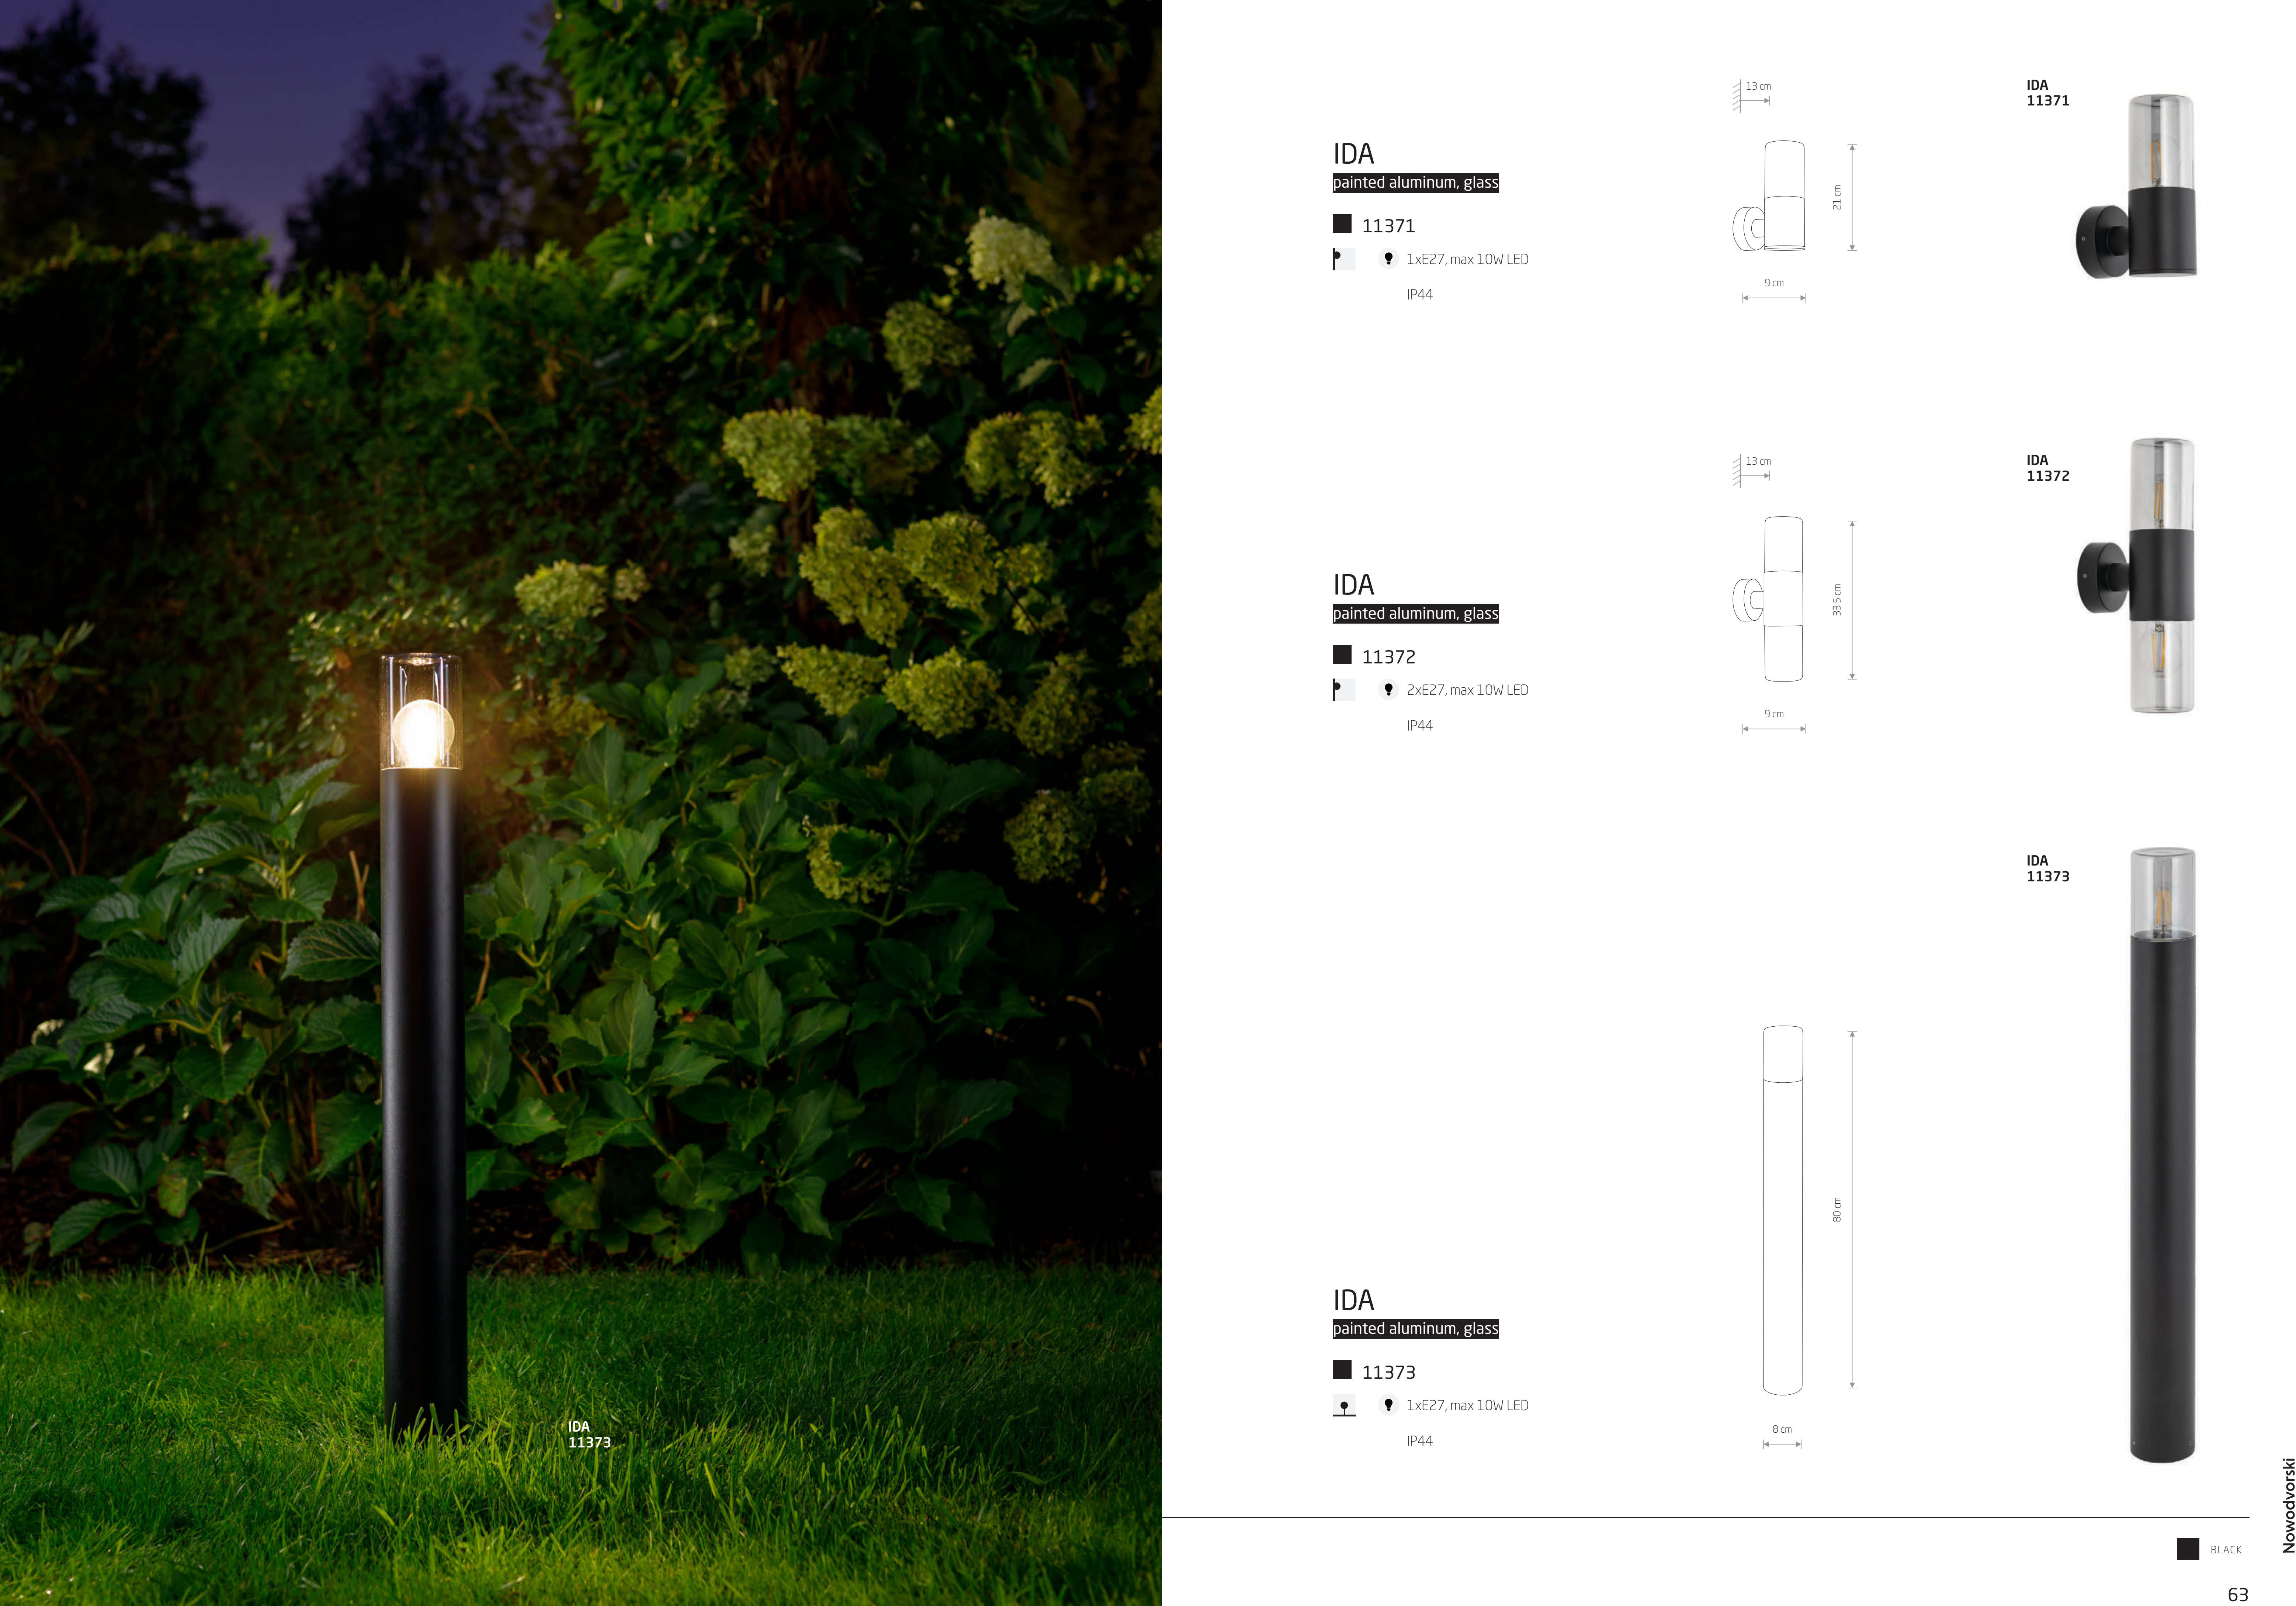

IDA
11373
IDA
painted aluminum, glass
11371
1xE27, max 10W LED
IP44
13 cm
21 cm
9 cm
IDA
11371
IDA
painted aluminum, glass
11372
2xE27, max 10W LED
IP44
13 cm
33,5 cm
9 cm
IDA
11372
IDA
painted aluminum, glass
11373
1xE27, max 10W LED
IP44
80 cm
8 cm
IDA
11373
BLACK
Nowodvorski
LIGHTING







NEL LED


painted aluminum, glass

11368

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11368	5W LED	3000K	500 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	>0.5	IP54	30000h

BLACK







NEL LED

painted aluminum, glass


11370

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11370	2x5W LED	3000K	880 lm	120 °	>80	~220-230 V, 50/60 Hz	⏚	>0.5	IP54	30000h

BLACK

Nowodvorski LIGHTING







SEMI LED S

painted aluminum, glass

11363 11365




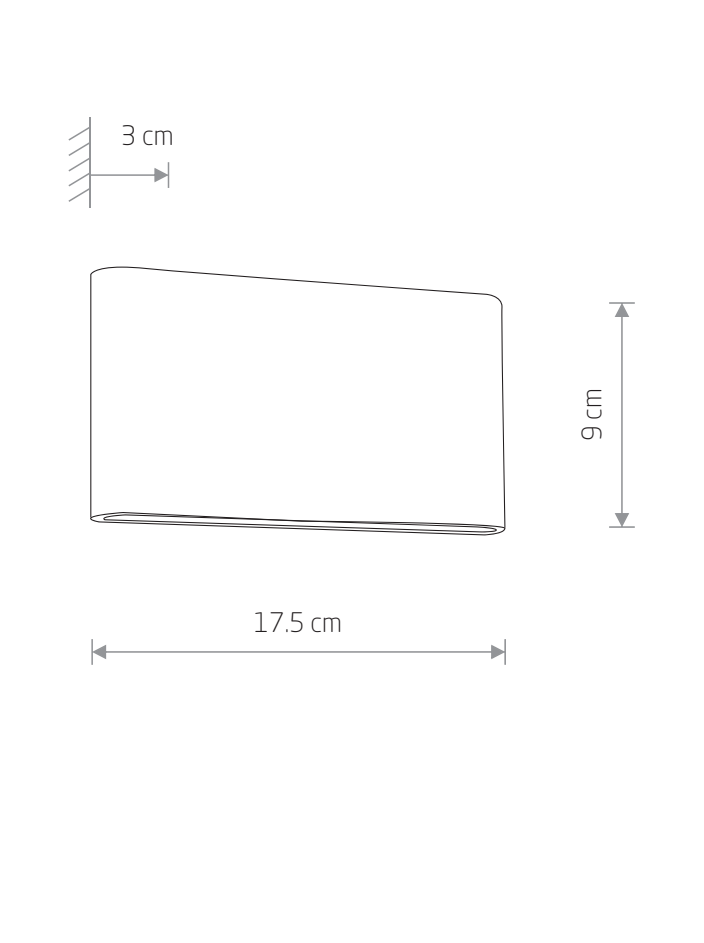

SEMI LED M

painted aluminum, glass

11364 11366





Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11363	2x3W LED	3000K	300 lm	40 °	>80	~220-230 V, 50/60 Hz	⏚	>0.5	IP54	30000h
11365	2x3W LED	3000K	300 lm	40 °	>80	~220-230 V, 50/60 Hz	⏚	>0.5	IP54	30000h


BLACK BRASS

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11364	2x5W LED	3000K	500 lm	40 °	>80	~220-230 V, 50/60 Hz	⏚	>0.5	IP54	30000h
11366	2x5W LED	3000K	500 lm	40 °	>80	~220-230 V, 50/60 Hz	⏚	>0.5	IP54	30000h

BLACK BRASS








CLINE LED

painted aluminum, glass

■ 11377

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11377	3W LED	3000K	130 lm	80 °	>80	~220-230 V, 50/60 Hz	⏚	>0.5	IP54	30000h

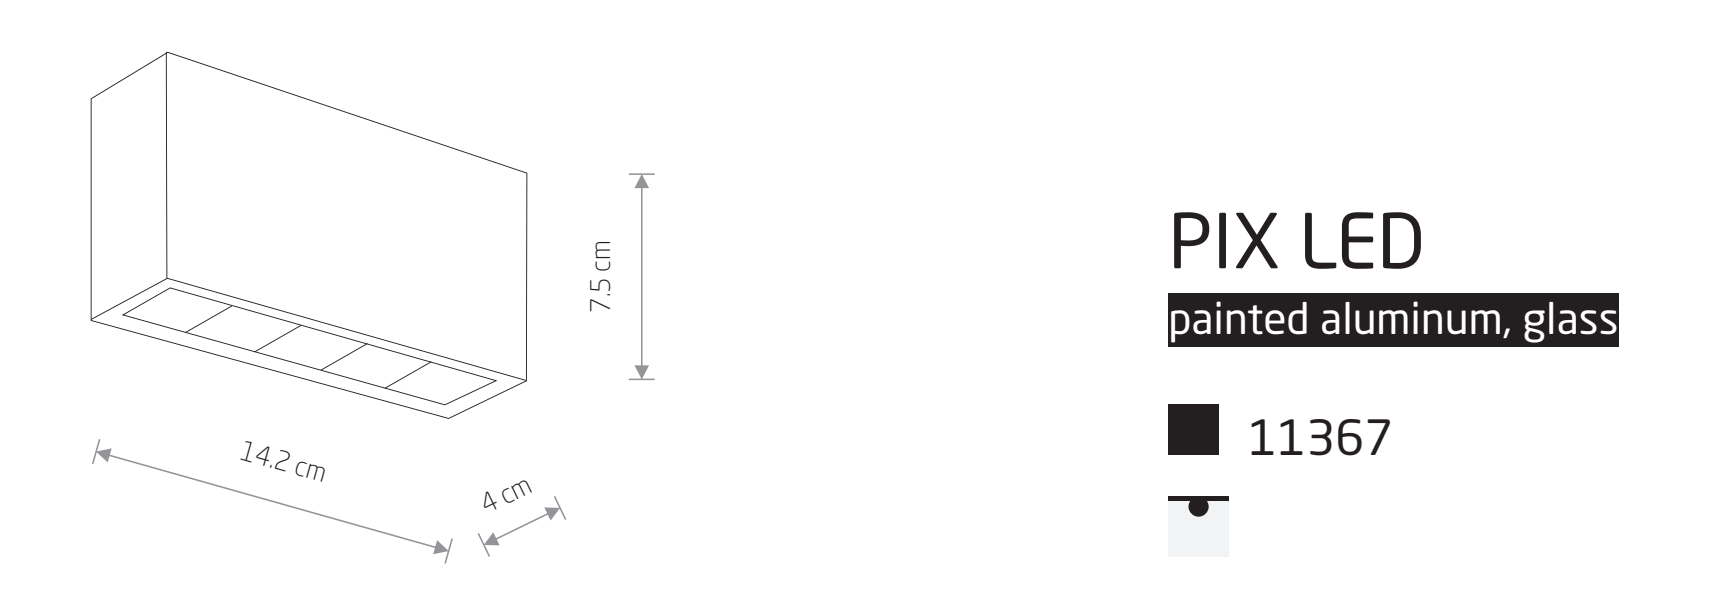

PIX LED

painted aluminum, glass


■ 11367

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11367	10W LED	3000K	500 lm	30 °	>80	~220-230 V, 50/60 Hz	⏚	>0.5	IP54	30000h

■ BLACK

■ BLACK






BULB LED G9, 4W

plastic PC

7503 3000K   7504 4000K







REFLECTOR LED, GU10, R50, 7W, DIMMABLE

plastic PC

10996 3000K   10995 3000K

10998 4000K   10997 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Power factor	Lifetime
10995	7W LED	3000K	600 lm	50 °	>80	~220-230 V, 50/60 Hz	>0.7	25000h
10996	7W LED	3000K	600 lm	50 °	>80	~220-230 V, 50/60 Hz	>0.7	25000h
10997	7W LED	4000K	600 lm	50 °	>80	~220-230 V, 50/60 Hz	>0.7	25000h
10998	7W LED	4000K	600 lm	50 °	>80	~220-230 V, 50/60 Hz	>0.7	25000h
7503	4W LED	3000K	380 lm	360 °	≥80	~220-230 V, 50/60 Hz	>0.5	25000h
7504	4W LED	4000K	390 lm	360 °	≥80	~220-230 V, 50/60 Hz	>0.5	25000h

WHITE   BLACK



Nowodworski sp.j.
ul. Bojemskiego 11
42-202 Częstochowa
POLAND

+48 34 344 91 10 / 11
+48 34 344 91 12
nowodvorski@nowodvorski.com
www.nowodvorski.com

